German Engineered

Cooking Solutions

Bosch Home Appliances

Edition 2014

www.bosch-home.com.au

BOSCH
Invented for life

Technologies that not only improve our life today, but tomorrow as well.

Green Technology inside
This signet denotes products that focus on energy and water efficiency while achieving top performance based on Bosch technologies – and, like all Bosch products, have been manufactured with the aim of minimising their impact on the environment. The signet stands for the resource-efficiency of our products – quite simply, for their 'Green Technology'.

Scan QR code for more information

Great journeys start with a single step
Resource efficiency is a subject that affects us all. Continuing climate change caused by the damaged ozone layer is the result of carbon dioxide (CO^2) emissions from the burning of fossil fuels. These emissions are increasing on a daily basis due to the vast amount of resources we consume. To minimise our consumption, we need to slow down the rate of growth by making more efficient use of our resources. At Bosch, we design some of the most efficient home appliances in the world. For example, our ActiveWater Plus dishwashers are amongst the most resource-efficient in the world, generating the cleaning power of over 4000 litres from as little as 12.3 litres per wash, selected Bosch Induction cooktops feature an Energy Consumption Display and selected Bosch rangehoods now come with the energy efficient EcoSilence Drive® brushless motor.

Buying Bosch resource-efficient appliances means you can reduce your water and energy consumption without compromising on performance. At Bosch, we believe you should never have to sacrifice excellence to embrace the planet we live on.

Improvements in energy and water consumption over the past 15 years with the super-efficient Bosch home appliances

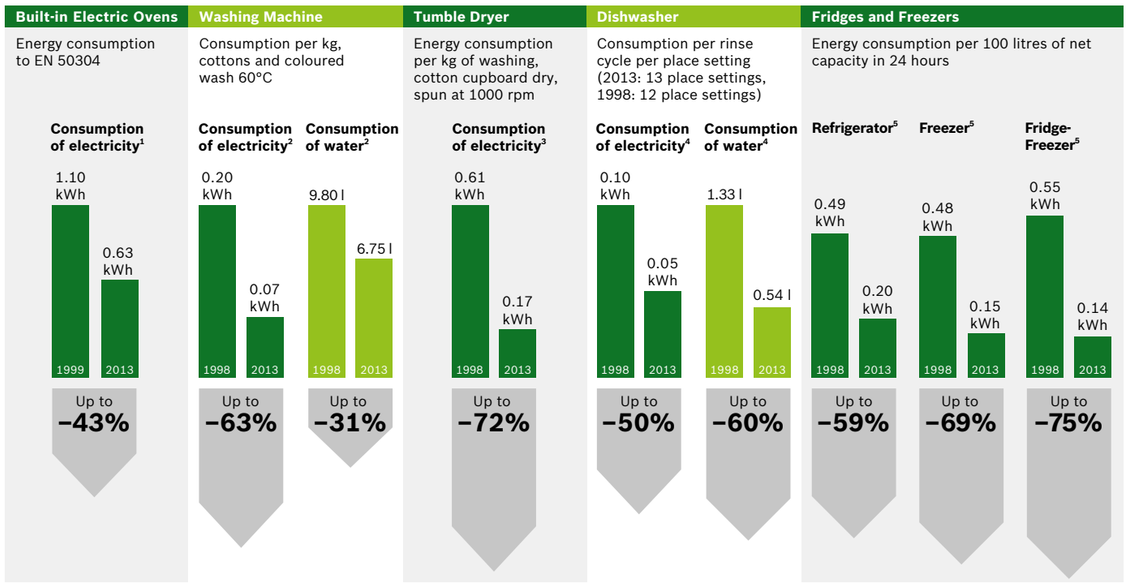

[1] Comparison between the consumption values as determined based on the standard program for the Bosch electric oven HBG38B722D/HBG38B752D/HBG38B762D from 2013 and the similarly determined consumption values for a comparable Bosch appliance in 1999.

[2] Comparison between the consumption values as determined based on the standard program cottons and coloured wash 60°C at full load for the Bosch washing machine WAY2874W2 from 2013 and the similarly determined consumption values for a comparable Bosch appliance in 1998.

[3] Comparison between the consumption values as determined based on the standard program cotton cupboard dry for the Bosch tumble dryer WTY887W1 from 2013 and the similarly determined consumption values for a comparable Bosch appliance in 1998.

[4] Comparison between the consumption values as determined due to EU-Regulation 1059/2010 (directive 2010/30/EU) based on the standard program Eco 50° for the Bosch dishwasher SMS69U88EU/ SMI69U85EU from 2013 and the similarly determined consumption values for a comparable Bosch appliance in 1998.

[5] Comparison between the consumption values as determined due to EU-Regulation 1060/2010 (directive 2010/30/EU) based on the standard program for Bosch refrigerator KIL18A75, Bosch freezer GSN58AW40 and Bosch fridge-freezer KGN39XI40 from 2013 and the similarly determined consumption values for comparable Bosch appliances in 1998.

Percentages expressed in the above diagrams apply to appliances sold in Europe. Source: BSH Bosch und Siemens Hausgeräte GmbH.

Contents.

Green Technology inside	02-03
Ovens	**08-17**
Cooking programs	12
Single ovens	13-16
Double ovens	17
Freestanding cookers	**18-19**
Compact appliances	**20-25**
Coffee machine	23
Combination steam and pure steam ovens	24
Combination microwave oven and microwave	24-25
Warming drawers	25
Electric cooktops	**26-37**
FlexInduction cooktops	32-33
CombiInduction® cooktops	33
Induction cooktops	34-35
Ceramic cooktops	36-37
Gas cooktops	**38-42**
Rangehoods	**43-49**
Reference guides	50-61
Accessories for ovens, cookers and compact appliances	**62-63**
Technical diagrams	64-70
Customer service	71

For more information and recipes, visit **cookingwithbosch.com**

When everything matches.

Bosch design and style.
Give your home an edge with stylish products that complement modern design. The kitchen can become the most stylish area of any living space. With this in mind, Bosch appliances are designed to not only perform the best, but also look the best. The combination of straight lines and curved features in stainless steel reflects the trend towards rounded and elegant contours.

Bosch appliances offer premium quality, advanced technology, ease of operation and outstanding German made and engineered technology. These attributes have earned us many accolades, national, and international, such as the red dot design award, the iF design award and other endorsements year after year.

reddot
International Design Award

product design award

German Engineered

“Designing the line of Bosch built-in appliances presented us with a major challenge: how to combine an attractive design with the latest technology and functions. The result was a timeless style that creates an outstanding degree of harmony in your kitchen. After all, what could afford greater pleasure than when everything matches.”
Robert Sachon, Head of Bosch Brand Design.

Ovens.

Using the highest quality stainless steel and glass, our ovens and compact appliances combine beautifully to deliver a timeless, elegant and stylish finish to any kitchen with sleek, co-ordinated lines and matching panels.

Built-in single ovens
Our ovens combine high-quality stainless steel and glass for a sleek finish on all models. Multiple cooking and cleaning options offer convenience.

Compact appliances
Bosch compact appliances offer exceptional cutting-edge features and extras. Enjoy healthy steamed cooking, quick microwave technology or the convenience of warming drawers.

Double ovens
Bosch double ovens allow you to roast in the bottom oven cavity while grilling in the top oven for maximum cooking convenience.

Freestanding cookers
Each of the freestanding cookers offers reliable and enduring Bosch technology of the finest standard – technology that makes cooking, baking and roasting easy and more convenient.

PREMIUM

Premium models with exceptional cutting-edge features and extras. The design has been refined to give you the ultimate in contemporary style with LED displays, retractable controls and metal-touch-control panels.

LIFESTYLE

Mid-range models with a broad range of extra features and benefits. The unique U-form door design, glass-on-metal door construction, all-steel handles and retractable controls ensure these ovens stand apart. Features included large LED displays and a broad range of cooking functions.

CLASSIC

Simple, practical models offering Bosch build quality and value for money. Cooking functions are simplified and include easy-to-use large display windows and touch-controls.

Ovens.

Cleaning

Scan QR code for more information on Pyrolytic self-cleaning

Pyrolytic self-cleaning system
The ultimate in self-cleaning power and convenience. The oven is heated to approximately 480°C and the door is locked for safety purposes. At this temperature, cooking residue is reduced to a thin layer of ash that can simply be wiped away with a damp cloth.

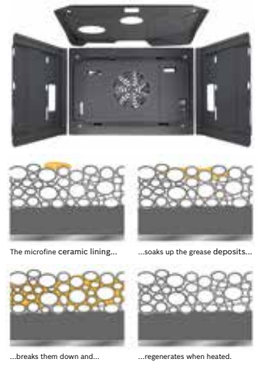

Oven cleaning made easy with EcoClean
The energy-saving cleaning aid. A special coating of microfine ceramic spheres on the oven's interior walls breaks down spattering grease while you bake or roast – and continues to do so for the entire service life of the appliance.

Scan QR code for more information on EcoClean

Design

Enamel coating
The grey enamel interior coating is easy-to-clean and the lighter colour improves visibility during cooking.

Retractable controls
The retractable controls not only make the oven easy to operate but also maintain a clean line when the oven is not in use, making the oven control panel easy to clean.

Convenience

Full glass inner door
The full glass inner door has no joints or screws – a common area that can accumulate grease. For added convenience, the doors can be easily removed for cleaning.

SoftClose technology
Thanks to a special damping mechanism, the oven door now closes softly and silently. This protects both the oven and oven door in the long term.

Telescopic racking system
No more heavy lifting, the sliding shelf mechanism gives you easy, direct access to oven trays.

Available on selected models only.

Oven clock and timer with programming
The electronic clock displays time of day and also acts as a countdown timer with an audible beep to indicate the end of the timer function. Programming adds extra convenience. Simply select the end-time (when you arrive home, e.g. 6.30pm), the length of cooking, along with the cooking function and temperature, and the oven will do the rest.

Precise temperature control
Electronic thermostats monitor the ovens cavity temperature to maintain temperature consistency during the cooking process.

XL oven cavity
Selected Bosch single ovens have an interior capacity of 67 usable net litres, making them capable of roasting even the largest cuts of meat.

Side-opening doors
Bosch Side-opening oven (right and left) doors open fully to 180 degrees providing easy access to the oven interior.

Safety

CoolTouch doors
For added safety, selected Bosch single ovens are fitted with quadruple-glazed CoolTouch doors. The reflective inner glass is designed to keep the heat in, while providing a safe-to-touch door on the outside.

Child lock
Selected Bosch ovens feature a child lock function. The entire oven can be disabled simply by activating the lock function, helping protect against unwanted use.

Automatic switch-off
The oven will switch-off after a specific period of time if left unattended.

Available on selected models only.

Cabinetry cooling fan
The fan circulates cool air around the oven to keep the appliance and the surrounding cabinetry free from the hot air vented by the oven.

Features vary depending on models. Please check individual product specifications.

Choosing the right heating function.

Our modern ovens offer a range of heating functions designed to ensure superb end results – whatever you're cooking.

3D HotAir Plus heat distribution

3D HotAir Plus
A round heating element is neatly concealed around the fan. With strategically placed vents in the rear of the cavity the 3D HotAir Plus function provides improved heat distribution and constant circulation of hot air. This eliminates hot spots, allowing you to cook on three levels simultaneously.

HotAir Eco
Our research shows that cooking on a single level is the most common form of cooking in an oven. That's why Bosch developed HotAir Eco, which uses less energy when compared to cooking on up to three levels. By only using one tray, this energy efficient function distributes less heat into the oven and uses residual heat to maintain the set temperature, which would otherwise be absorbed by additional trays.

Top and bottom heating
Uses both the upper and lower heating elements. The heat travels to the centre of the oven by natural convection, which is the best position to obtain the selected temperature. Most foods can be cooked using this system, but it's best suited to foods that require a dark crisp finish or long, slow cook.

Bottom heating
Only the bottom element is used to generate heat. This method is ideal for reheating or for when a crisp underside is required for pizza bases and pastry cases. It can also be used for drying herbs and bain-marie cooking.

Hot air grilling
An ideal cooking method for meat and poultry where a rotisserie effect is desired. The grill and fan operate alternately, which results in even, crisp food and can use less energy than traditional roasting.

Grill - large area
Enables you to grill large quantities with precise temperature control. For added efficiency, grilling is performed with the oven door closed.

Grill - small area
On selected ovens, you have the option to select just the centre section of the grill element as an economical way to grill smaller quantities of food.

Pizza setting
Designed with the pizza-lover in mind, but equally useful for quiches and tarts, this innovative function delivers cooking power for a perfectly crisp, browned base while keeping the topping moist. Suitable also for frozen food. In many cases, preheating is not required.

Defrost
Perfect for gentle defrosting of meat, poultry, bread and much more.

Rapid heating
Most Bosch ovens feature an automatic rapid heating function. On Top and Bottom heating, 200°C can be reached in approximately six minutes, and 175°C on 3D HotAir Plus heating can be reached in approximately five minutes.

Scan QR code for more information on 3D HotAir Plus

Features vary depending on models. Please check individual product specifications.

Ovens.

Bosch ovens bring style and elegance to the kitchen.

HBG73S550A
60cm Stainless Steel Pyrolytic Oven

Heating functions
9 functions

Capacity
65 usable litres (net)
5 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming
2-level telescopic rails for easy access to trays
SoftClose door

Cleaning
3-stage pyrolytic cleaning with pyrolytic compatible enamelled trays

Safety
Quadruple-glazed CoolTouch door
Child lock

Dimensions (HxWxD)
595 x 595 x 548mm

For complete specifications see pg.50-51

PREMIUM

HBA63S451A
60cm Stainless Steel Pyrolytic Oven

Heating functions
6 functions

Capacity
65 usable litres (net)
5 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming
2-level telescopic rails for easy access to trays

Cleaning
3-stage pyrolytic cleaning with pyrolytic compatible enamelled trays

Safety
Quadruple-glazed CoolTouch door
Child lock

Dimensions (HxWxD)
595 x 595 x 548mm

For complete specifications see pg.50-51

LIFESTYLE

HBA63B250A
60cm Stainless Steel Pyrolytic Oven

Heating functions
6 functions

Capacity
65 usable litres (net)
5 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming

Cleaning
3-stage pyrolytic cleaning with pyrolytic compatible enamelled trays

Safety
Quadruple-glazed CoolTouch door
Child lock

Dimensions (HxWxD)
595 x 595 x 548mm

For complete specifications see pg.50-51

CLASSIC

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Ovens.

Bosch ovens bring style and elegance to the kitchen.

HBL43S450A
60cm Stainless Steel EcoClean Oven

Heating functions
5 functions

Capacity
67 usable litres (net)
5 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming
2-level telescopic rails for easy access to trays
Side-opening (left hinged) door

Cleaning
EcoClean System: absorbs odours, grease and fats (rear wall, side walls & ceiling liners)

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
595 x 595 x 548mm

For complete specifications see pg.50-51

LIFESTYLE

HBR43S450A
60cm Stainless Steel EcoClean Oven

Heating functions
5 functions

Capacity
67 usable litres (net)
5 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming
2-level telescopic rails for easy access to trays
Side-opening (right hinged) door

Cleaning
EcoClean System: absorbs odours, grease and fats (rear wall, side walls & ceiling liners)

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
595 x 595 x 548mm

For complete specifications see pg.50-51

LIFESTYLE

HBG43S450A
60cm Stainless Steel EcoClean Oven

Heating functions
5 functions

Capacity
67 usable litres (net)
5 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming
2-level telescopic rails for easy access to trays
SoftClose door

Cleaning
EcoClean System: absorbs odours, grease and fats (rear wall, side walls & ceiling liners)

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
595 x 595 x 548mm

For complete specifications see pg.50-51

LIFESTYLE

HBG43S420A
60cm Stainless Steel EcoClean Oven

Heating functions
5 functions

Capacity
67 usable litres (net)
5 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming
2-level telescopic rails for easy access to trays
SoftClose door

Cleaning
EcoClean System: absorbs odours, grease and fats (rear wall, side walls & ceiling liners)

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
595 x 595 x 548mm

For complete specifications see pg.50-51

LIFESTYLE

HBA13B254A
60cm Stainless Steel EcoClean Oven

Heating functions
4 functions

Capacity
67 usable litres (net)
5 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming

Cleaning
EcoClean System: absorbs odours, grease and fats (rear wall & ceiling liners)

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
595 x 595 x 548mm

For complete specifications see pg.50-51

CLASSIC

HBA13B253A
60cm Stainless Steel EcoClean Oven

Heating functions
4 functions

Capacity
62 usable litres (net)
5 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming

Cleaning
EcoClean System: absorbs odours, grease and fats (rear wall liner)

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
595 x 595 x 515mm

For complete specifications see pg.50-51

CLASSIC

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Ovens.

Bosch ovens bring style and elegance to the kitchen.

HBX33R51
90cm Stainless Steel Catalytic Oven

Heating functions
8 functions

Capacity
77 usable litres (net)
4 shelf positions

Convenience
Electronic clock/timer

Cleaning
Catalytic liners reduce odours, grease and fats (side walls)

Safety
Double-glazed door

Dimensions (HxWxD)
480 x 896 x 566mm

For complete specifications see pg.50-51

8 Heating Functions | Catalytic | XXL cavity

LIFESTYLE ★ ★ ★ ★ ★

Double Ovens.

HBM43S550A
60cm Stainless Steel EcoClean Double Oven

Heating functions
3 functions - top oven
5 functions - bottom oven

Capacity
35 usable litres (net) - top oven
67 usable litres (net) - bottom oven
2 shelf positions - top oven
5 shelf positions - bottom oven

Convenience
Electronic touch-control clock/timer with end-time programming
2-level telescopic rails for easy access to trays - bottom oven

Cleaning
EcoClean System: absorbs odours, grease and fats (rear wall, side walls & ceiling liners) - both top and bottom ovens

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
888 x 595 x 550mm

For complete specifications see pg.50-51

8 Heating Functions | 3D HotAir Plus | Rapid Heating | EcoClean | Telescopic | Child lock | XL cavity

LIFESTYLE ★ ★ ★ ★ ★

HBM43B250A
60cm Stainless Steel EcoClean Double Oven

Heating functions
2 functions - top oven
5 functions - bottom oven

Capacity
35 usable litres (net) - top oven
67 usable litres (net) - bottom oven
2 shelf positions - top oven
5 shelf positions - bottom oven

Convenience
Electronic touch-control clock/timer with end-time programming

Cleaning
EcoClean System: absorbs odours, grease and fats (rear wall, side walls & ceiling liners) - both top and bottom ovens

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
888 x 595 x 550mm

For complete specifications see pg.50-51

7 Heating Functions | 3D HotAir Plus | Rapid Heating | EcoClean | Child lock | XL cavity

LIFESTYLE ★ ★ ★ ★ ★

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Freestanding cookers.

Our beautiful, state-of-the-art freestanding cookers provide a focal point for any kitchen.

Design

The combination of high quality stainless steel and glass gives a premium clean look and finish.

More space for larger meals
Bosch freestanding cookers offer up to 112 litres of interior capacity, which can accommodate larger meals. And with the choice of up to five different shelf levels, you're guaranteed total flexibility.

Cooking with gas
Gas provides fast and instant cooking versatility. The cooktops on the freestanding cookers feature Bosch flame failure technology fitted to each burner. The stainless steel cooktop surface is fitted with removable cast-iron pan supports for durable performance.

Induction cooktops
With electronic touch-controls, Bosch Induction cooktops combine great looks with intelligent function and design. The smooth glass cooktops surface is tough and durable as well and being practical and easy to clean.

Convenience

XXL oven cavity
With a capacity ranging from 67-112 litres, the Bosch range of freestanding cookers provides additional space for larger serving portions. The greater distance between the shelves optimises heat circulation for perfect cooking results.

Rapid heating
Save time at the press of a button by heating up to 30% faster. Once the desired temperature is reached, the selected heating method is automatically activated.
Available on selected models only.

Electronic clock and timer
All in one: minute minder, time of day display, start/stop button for setting the cooking time and the option for entering the time when the dish should be ready.

Cleaning

WipeProtection
A handy function that freezes the current settings and allows the surface to be wiped down in case of spills. This saves having to switch-off the cooktop or risk accidentally changing the settings. The control panel is reactivated at the touch of the function key or after 20 seconds.
Available on induction freestanding cooker.

Safety

CoolTouch window
For added safety, selected Bosch freestanding cookers are fitted with quadruple-glazed CoolTouch doors. The reflective inner glass is designed to keep heat in, while providing a safe-to-touch door on the outside.

Child lock
A button that inhibits all oven functions and prevents unwanted use.
Available on selected models only.

New

HSB738356A
90cm Freestanding Gas/Catalytic Cooker

OVEN SPECS

Heating functions
8 functions

Capacity
112 usable litres (net)
4 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming
1-level telescopic rails for easy access to trays
Rotisserie kit
Height-adjustable legs

Cleaning
Catalytic liners reduce odours, grease and fats (rear wall and side walls)

Safety
Triple-glazed door

COOKTOP SPECS

Heating functions
6 gas burners: 1 x wok burner, 1 x high-speed burner, 2 x standard burners, 2 x economy burners,

Convenience
One-hand ignition via control knobs
Enamelled cast-iron pan supports

Safety
Flame failure for each burner stops gas flow if flames go out

Other
Suitable for NG or LPG

Dimensions (HxWxD)
845-880 x 898 x 600mm

For complete specifications see pg.52-53

LIFESTYLE

HGV74W355A
60cm Freestanding Gas/EcoClean Cooker

OVEN SPECS

Heating functions
8 functions

Capacity
67 usable litres (net)
5 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming
2-level telescopic rails for easy access to trays
SoftClose door
Height-adjustable legs

Cleaning
EcoClean System: absorbs odours, grease and fats (rear wall, side walls & ceiling liners)

Safety
Triple-glazed door
Child lock

COOKTOP SPECS

Heating functions
4 gas burners: 1 x 12Mj/h wok burner, 2 x standard burners, 1 x economy burner

Convenience
One-hand ignition via control knobs
Enamelled cast-iron pan supports

Safety
Flame failure for each burner stops gas flow if flames go out

Other
Suitable for NG or LPG

Dimensions (HxWxD)
900 x 600 x 600mm

For complete specifications see pg.52-53

LIFESTYLE

HCE858451A
60cm Freestanding Induction/Pyrolytic Cooker

OVEN SPECS

Heating functions
10 functions
AutoPilot40 - 40 preset cooking programs

Capacity
67 usable litres (net)
5 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming
SoftClose door
Height-adjustable legs

Cleaning
3-stage pyrolytic cleaning with pyrolytic compatible enamelled trays

Safety
Quadruple-glazed door
Child lock

COOKTOP SPECS

Heating functions
4 induction cooking zones with automatic pot detection
17-stage power setting with PowerBoost for each zone

Convenience
Electronic -/+ touch-controls & timer for each zone

Cleaning
WipeProtection pauses all settings for easy cleaning while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (HxWxD)
900 x 600 x 600mm

For complete specifications see pg.52-53

PREMIUM

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Compact appliances.

Bosch compact appliances offer exceptional cutting-edge features and extras. Matching controls and metal-touch-control panels mean that you can mix and match compact appliances for a coordinated look. With electronic controls, operating functions are harmonised for easy use.

Combination steam oven
The combination steam oven offers total flexibility to steam, bake or both, and produce tender but crispy results. Cooking with steam helps retain vitamins and minerals in fresh foods as well as maintain original colour, shape and consistency.

Pure steam oven
The Bosch steamer allows you to steam fresh or frozen food with ease. With temperature settings between 35-100°C and electronic controls, Bosch steamers are the perfect complement to any kitchen. Enjoy the convenience of split-level steaming, your Bosch steamer comes with accessories that allow you to prepare different food types simultaneously on up to four levels.

Combination microwave oven
The Bosch combination microwave oven offers a mix of both traditional oven functions as well as the speed and versatility of microwave technology. Discover the convenience of quickly reheated food using the microwave while maintaining crunch and texture using the convection oven.

Inverter microwave
Bosch INNOWAVE inverter technology delivers five power levels from 90-1000W offering more consistent and even results for your cooking convenience. Press the memory function to store your favourite recipes (e.g. heating mode + temperature + cooking duration).

Warming drawers
Bosch warming drawers ensure food stays just at the right serving temperature. You can gently defrost, prove dough or slow cook. They are the perfect partner for Bosch's 60cm wide built-in ovens and compact appliances.

Coffee machine
Whether your preference is a skinny Latte, a double shot Cappuccino or a delicious hot chocolate, our compact coffee machine brings café-style drinks to your home.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Compact appliances.

Design

Sleek lines
Our compact appliances combine the highest quality stainless steel and glass for a sleek and resistant finish. The ergonomically designed straight metal handle bar integrates perfectly with the door.

Retractable controls
The Bosch retractable rotary controls make the appliance easy to operate as well as maintain clean lines when the appliance is not in use, making the oven control panel easy to clean and match perfectly with our built-in ovens.

Electronic touch-controls
Our state-of-the-art appliances feature the latest in touch-control technology with electronic touch-controls, which only require the lightest touch to activate.

Convenience

Large 1.3 litre water tank
Direct connection to a water pipe is not necessary as our steamers feature a removable water tank, making it easy to refill when required. Audible and visual water tank empty indicator adds extra convenience.

Applies to models HBC34D554P and HBC24D553P.

AutoPilot
Simply select the appropriate program, enter the weight and press start. The automatic program then takes over to cook your dish to perfection.

Applies to models HBC34D554P, HBC24D553P, HBC84K553A and HMT35M653A.

3-stage programming
The 3-stage programming allows you to program up to three power levels and cooking times consecutively.

Applies to models HBC84K553A and HMT35M653A.

Cleaning

EcoClean – a world-first from Bosch
EcoClean liners are a highly efficient cleaning system. Grease and fat deposits are absorbed into the liners then during the cleaning cycle, oxygen is released, burning away deposits absorbed in the liners. Being more effective than standard catalytic liners alone, the EcoClean system will provide excellent cleaning performance.

Applies to models HBC84K553A.

Cleaning aid
The Bosch steamer includes a handy cleaning aid function. Any residual food in the cooking compartment is loosened by the steam, which allows for easy removal. The cleaning aid lasts approximately 30 minutes to create a clean interior.

Applies to models HBC34D554P and HBC24D553P.

Safety

Child lock
Some Bosch compacts offer a childproof lock to prevent unwanted use. For added security, the childproof lock remains active even after a power failure.

Applies to models HBC34D554P, HBC24D553P and HBC84K553A.

Automatic switch-off
For extra peace of mind, if left unattended, the appliance will switch-off after a specific period of time.

Applies to models HBC34D554P and HBC24D553P.

Coffee machine.

TCC78K751A
60cm Built-in Coffee Machine

Heating functions
Fastest first cup via rapid heating

Capacity
2.5 litre removable water tank
19 bar pump pressure
1kg coffee bean container volume

Convenience
Programmable functions including cup size, strength & temperature
High-quality CreamPro concept milk nozzle with suction function
Innovative brewing technology with AromaPro concept
SilentCeram drive ceramic grinding unit
Early warning indication when bean container or water tank close to empty
Milk froth, warm milk and hot water separately available
One touch function for Latte, Mocchiato, Cappuccino, Milk Coffee and personalised ‘MyCoffee’ function

Cleaning
Fully automatic-descaling and cleaning program
Hygienic, single portion cleaning function
Removable milk nozzle for easy cleaning (dishwasher-safe)

Dimensions (HxWxD)
454 x 595 x 535mm

For complete specifications see pg.55

PREMIUM

Design

SensoFlow System
The SensoFlow System guarantees a constant and optimum brewing temperature of 90-95°C. The two heating circuits run parallel to the water pipe for optimum energy efficiency and the fastest brewing time of 29 seconds.

AromaPro
A precise pressure system provides the finest flavour and an exquisite crema. The convex shaped tamper allows the water to follow a longer route through the ground coffee, releasing more aromas.

CreamPro
The CreamPro provides a unique integrated milk frother with a suction function to provide excellent milk froth and warm milk.

Precisely measured amounts of milk, air and steam are mixed together and brought to the optimum temperature. Large air bubbles are eliminated in the outlet chamber of the device.

SilentCeram Drive
The SilentCeram Drive offers pure enjoyment with every cup thanks to the optimum grinding process.

Bosch ceramic grinders are extremely durable and reliable, and unlike metal grinders, ceramic grinders dissipate heat quicker to ensure beans are not burnt during the grinding process especially after multiple grinds.

Convenience

OneTouch Function
Unique, integrated milk frother lets you create barista quality coffee at home, in OneTouch.

Create your own coffee just the way you like it, from a Cappuccino to a Latte Macchiato with the MyCoffee Function.

Cleaning

SinglePortion Cleaning
At the end of the brewing process, there is always coffee remaining in the pipe between the brewing unit and the coffee outlet.

To resolve this, Bosch have implemented a small ventilation aperture. This allows residual coffee to flow into the tray. This happens after every coffee brew and helps keep the machine brewing the perfect crema.

OneTouch Cleaning
The milk system also offers optimum hygiene thanks to its OneTouch cleaning function and a removable milk frother.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Compact appliances.

The collection of Bosch compact built-in appliances are designed to give you perfect symmetry in your kitchen.

For more information and recipes, visit **cookingwithbosch.com**

HBC34D554P
60cm Stainless Steel Combination Steam Oven

Heating functions
4 functions
Multi-level steaming from 35°C to 100°C
Fan-forced hot air combined with steam function for tender and crispy meats
AutoPilot40 - 40 preset cooking programs

Capacity
35 usable litres (net)
4 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming
1.3 litres removable water tank with empty water tank indicator
Stainless steel cavity

Cleaning
Descaling program

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
454 x 595 x 550mm

For complete specifications see pg.54

Steam Oven · Steam cooker · AutoPilot · Descale · Child lock

PREMIUM ★★★★★

HBC24D553P
60cm Stainless Steel Pure Steam Oven

Heating functions
Multi-level steaming from 35°C to 100°C
AutoPilot20 - 20 preset cooking programs

Capacity
38 usable litres (net)
4 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming
1.3 litres removable water tank with empty water tank indicator
Stainless steel cavity

Cleaning
Descaling program

Safety
Double-glazed door
Child lock

Dimensions (HxWxD)
454 x 595 x 550mm

For complete specifications see pg.54

Steam cooker · AutoPilot · Defrost · Descale · Child lock

LIFESTYLE ★★★★☆

HBC84K553A
60cm Stainless Steel Combination Microwave Oven

Heating functions
5 functions
5 microwave power levels up to 900 Watts inverter (all heating functions combinable with microwave function for speedy results)
AutoPilot20 - 20 Preset cooking programs

Capacity
42 usable litres (net)
3 shelf positions

Convenience
Electronic touch-control clock/timer with end-time programming
3-stage programming

Cleaning
EcoClean System: absorbs odours, grease and fats (rear wall liner)

Safety
Double-glazed door
Child lock

Dimensions (HxWxD)
454 x 595 x 531mm

For complete specifications see pg.54

5 Heating Functions · Inverter microwave · AutoPilot · 1-2-3 Programing · EcoClean · Child lock

PREMIUM ★★★★★

HMT35M653A
60cm Stainless Steel Microwave

Heating functions
5 microwave power levels up to 1000 Watts inverter technology
AutoPilot9 - 9 preset cooking programs

Capacity
36 usable litres (net)

Convenience
Electronic touch-control clock/timer with end-time programming
3-stage programming
2 memory functions
Stainless steel cavity

Dimensions (HxWxD)
454 x 595 x 563mm

For complete specifications see pg.54

Inverter microwave · AutoPilot · 1-2-3 Programing · M Memory function

LIFESTYLE ★★★★☆

HSC290652A / HSC140652A
60cm Stainless Steel Warming Drawers

Heating functions
30°C - 80°C temperature control
Integrated fan-forced hot air heating

Capacity
HSC290652A: 52 usable litres (net)
HSC140652A: 20 usable litres (net)

Convenience
Fully extendable telescopic drawer for easy access
Ceramic-glass base element
Suitable for: plate warming, keep warm, slow cooking, defrost and proving dough

Dimensions (HxWxD)
HSC290652A: 290 x 595 x 544mm
HSC140652A: 141 x 595 x 544mm

For complete specifications see pg.55

Plate warming · Keep warm · Slow cooking · Defrost

LIFESTYLE ★★★★☆

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Electric Cooktops.

There is a wide range of induction and ceramic cooktops to choose from. As you would expect from Bosch, all are made using high-quality materials, are easy to use and add versatility, style and elegance to any kitchen.



FlexInduction cooktops
The ultimate Bosch Induction experience. Unique technology provides even heating across the entire FlexZone. Enjoy total flexibility and control with two standard round zones and the FlexZone.



CombiInduction® cooktops
Experience the magic of CombiZone – two cooking zones can be linked. The MoveMode function automatically switches from boil to simmer with a simple slide of the saucepan.



Induction cooktops
Quite simply, Bosch has a range of induction cooktops that are designed to make it easier and quicker for you to create the dishes you love.

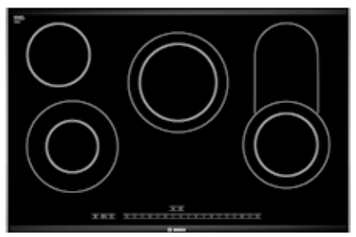

Ceramic cooktops
With their electronic touch-controls and flexible cooking zones, Bosch ceramic cooktops combine great looks with smart function and design.

PREMIUM

Premium models with exceptional features and sizes including FlexInduction technology. The slim brushed steel profile allows them to be built-in independently or coordinated with other cooktops. Advanced features include DirectSelect, WipeProtection and timer.

LIFESTYLE

Mid-range models with a broad range of extra features and benefits. Offering a choice of ceramic or state-of-the-art induction cooktops. Induction cooking is now widely recognised as one of the quickest, safest and most efficient methods of cooking available.

CLASSIC

Simple, practical models offering Bosch build quality and value for money. Straight-forward and easy-to-use, with up to 17 cooking power levels to choose from and even such technically advanced features as touch-controls and residual heat indicators.

The best cooking needs just one ingredient. Bosch Induction.

Modern cooking offers so many wonderful new tastes and textures, you need a cooktop that's flexible enough to keep up.

Old pots, new technology
Most of your old pots will also work with induction if they have a magnetic base. All pots and pans with ferromagnetic bases are suitable for induction. So, if a fridge magnet sticks to your pot, you know it's induction-ready. In general, special stainless steel, iron and enamel are all suitable.

Security
As the heat is generated in the pot, the cooking surface remains cooler than conventional cooking surfaces.

Efficiency
Induction cooktops offer the most efficient way of cooking at lower temperatures, i.e. melting chocolate, etc.

Cooking speed
Time required to heat 2 litres of water at 15°C-90°C

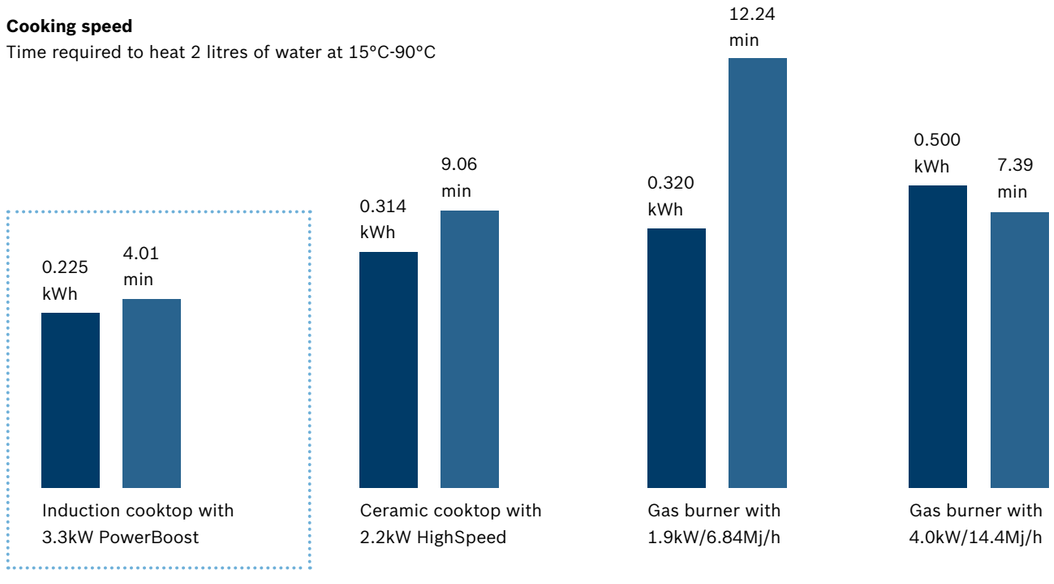

Source: BSH Bosch und Siemens Hausgeräte GmbH Germany (overseas test results)

Features may vary depending on models. Please check individual product specifications.

Design

Simple and practical, Bosch's benchmark induction cooktops have all the necessities to really get you cooking. All Bosch Induction cooktops are made with German-manufactured Schott Ceran ceramic glass for function and design.

Cook with a light touch.

When you're preparing a meal, there's no time to waste with complex cooking controls. With your Bosch Induction cooktop, you'll find a selection of brilliantly intuitive controls that make the entire cooking process so much easier to manage. Introducing TouchSelect, DirectSelect 1.0 and DirectSelect 2.0 from Bosch, all boasting 17-stage power settings.

DirectSelect 1.0
Enjoy total convenience with DirectSelect. Simply select the required power level from the power settings laid out on the cooktop, without the need to press +/- repeatedly.

DirectSelect 2.0
Maintain control even in the most hectic kitchen situations. Select your desired power level – including intermediate levels – with complete accuracy.

TouchSelect
With this control panel, you can regulate the desired cooking zone easily. Select your cooking zone and use the +/- keys to choose the power level you need.

Convenience

17-stage power setting
Enjoy total control on every recipe with 17-stage power settings. This function allows cooking zones to be set in increments of 0.5 (e.g. 0.5, 1, 1.5, 2....9).

PowerBoost – now with even more power!
PowerBoost channels increased power to a selected zone to turbocharge the cooking process. With PowerBoost, you can boil 2 litres of water almost three times faster than on a conventional glass-ceramic cooktop.

Dual function timer including automatic switch-off for each zone
Use the independent audible timer to set the length of cooking time or set the cooking zone at a specific temperature (i.e. level 5.5) for up to 99 minutes – ideal for busy households. Once the selected time has been reached, the cooking zone is switched off automatically.

Automatic pot detection
Bosch Induction cooktops feature automatic pot detection, which recognises the diameter of the cookware and determines the size of the cooking zone accordingly. If the pot is removed, the control panel indicator will flash and remain inactive until the pot is detected.

QuickStart
Start cooking quicker. New Bosch QuickStart functionality automatically detects the location of your pot and displays the cooking zone on the control panel. Just select the power level and you're away.

Available on selected models only.

ReStart
Things happen quickly in the kitchen – if you spill something on the control panel or accidentally switch-off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

Available on selected models only.

Energy Consumption Display
Each time you finish cooking, your Energy Consumption Display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money. (For example, placing a lid on a pot can help reduce your energy consumption).

Available on selected models only.

Bosch Induction: Setting the standards.

On every Bosch Induction cooktop, you'll find clever features that set them apart from the ordinary.

Features may vary depending on models. Please check individual product specifications.

Convenience

Put the flex in Flexibility.

Introducing Bosch FlexInduction, the result of decades of research and development. Introducing freedom in the kitchen.

Ideal for small pots, large pots, multiple pans, frying pans or casserole dishes – you name it, the system allows you to control pots and pans separately.

An electromagnetic current applies heat only where it's needed – in the pot. At the flick of a switch, two induction zones become one large induction surface.

CombiInduction®. Cooking with you side-by-side.

Bosch CombiInduction® lets you switch from small to large and oversized pans, like Teppan Yaki, simply and easily. So now there's no limit to the tastes you can create.

CombiZone
Because you can choose the size of the heated area, with Bosch CombiInduction® you have the freedom to use your biggest pans and baking trays for more adventurous cooking. Switching from small to large pans is as simple as a single touch that merges two cooking zones into one.

MoveMode
When your recipe requires you to switch from boil to simmer at just the right moment, MoveMode is there when you need it. Switch from level 9 to level 1 by simply sliding your pot. MoveMode lets you move seamlessly from your first high-powered cooking task to the next, without a hiccup, and always in control.

Cleaning

WipeProtection
Stay in complete cooking control even while you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surfaces easily, without losing your cooking settings.

Safety

2-stage residual heat indicators
Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h'- residual heat insufficient to cook, but zone is still hot enough to advocate caution.

Child lock
Maximum safety for tiny hands. Lock your cooktop's control panel and prevent accidental little chefs from 'helping out' and hurting themselves. Enjoy the reassurance of maximum safety for both you and your loved ones.

Automatic safety switch-off
Never worry again if you have forgotten to turn off the cooktop. If you've stopped using it, your Bosch Induction cooktop will automatically shut down.

FlexInduction and CombiInduction® Cooktops.

Grilled to perfection on a Bosch FlexInduction Cooktop and Griddle Plate accessory.

For more information and recipes, visit **cookingwithbosch.com**

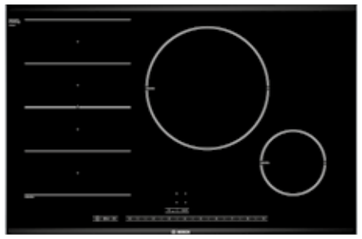

PIN875N17E
80cm FlexInduction Cooktop

Heating functions
4 induction cooking zones:
1 large FlexInduction zone for large pans or multiple smaller pans
17-stage power setting with PowerBoost for each zone

Convenience
Electronic DirectSelect 2.0 touch-controls
Dual timer with auto switch-off for each zone

Cleaning
WipeProtection pauses all settings for easy cleaning while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
816 x 527mm

For complete specifications see pg.56-57

PREMIUM ★ ★ ★ ★ ★



PIN675N17E
60cm FlexInduction Cooktop

Heating functions
4 induction cooking zones:
1 large FlexInduction zone for large pans or multiple smaller pans
17-stage power setting with PowerBoost for each zone

Convenience
Electronic DirectSelect 2.0 touch-controls
Dual timer with auto switch-off for each zone

Cleaning
WipeProtection pauses all settings for easy cleaning while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
606 x 527mm

For complete specifications see pg.56-57

PREMIUM ★ ★ ★ ★ ★

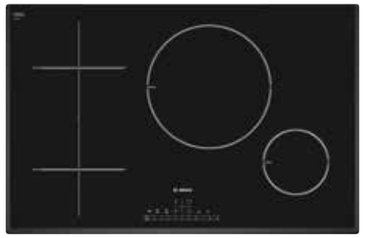

PIT851F17E
80cm CombiInduction® Cooktop

Heating functions
4 induction cooking zones:
2 combinable zones 'CombiZone' for large pans
17-stage power setting with PowerBoost for each zone

Convenience
Electronic DirectSelect 1.0 touch-controls
Dual timer with auto switch-off for each zone
MoveMode for automatic keep warm and boil settings
QuickStart
ReStart
Energy Consumption display

Cleaning
WipeProtection pauses all settings for easy cleaning while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
806 x 522mm

For complete specifications see pg.56-57

LIFESTYLE ★ ★ ★ ★ ★



PIT651F17E
60cm CombiInduction® Cooktop

Heating functions
4 induction cooking zones:
2 combinable zones 'CombiZone' for large pans
17-stage power setting with PowerBoost for each zone

Convenience
Electronic DirectSelect 1.0 touch-controls
Dual timer with auto switch-off for each zone
MoveMode for automatic keep warm and boil settings
QuickStart
ReStart
Energy Consumption display

Cleaning
WipeProtection pauses all settings for easy cleaning while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
592 x 522mm

For complete specifications see pg.56-57

LIFESTYLE ★ ★ ★ ★ ★

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Induction Cooktops.

Cooking with induction provides faster results and efficient cooking at higher and lower temperatures. The TouchSelect, DirectSelect 1.0 and DirectSelect 2.0 intuitive controls all boast 17-stage power settings. Bosch Induction cooktops make the entire cooking process so much easier to manage.

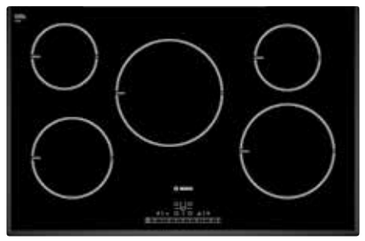







PIM851F17E
80cm Induction Cooktop

Heating functions
5 induction cooking zones
17-stage power setting with PowerBoost for each zone

Convenience
Electronic DirectSelect 1.0 touch-controls
Dual timer with auto switch-off for each zone
QuickStart
ReStart
Energy Consumption display

Cleaning
WipeProtection pauses all settings for easy cleaning while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
802 x 522mm

For complete specifications see pg.56-57

LIFESTYLE

PIE775N14E
70cm Induction Cooktop

Heating functions
4 induction cooking zones
17-stage power setting with PowerBoost for each zone

Convenience
Electronic DirectSelect 2.0 touch-controls
Dual timer with auto switch-off for each zone

Cleaning
WipeProtection pauses all settings for easy cleaning while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
710 x 527mm

For complete specifications see pg.56-57

LIFESTYLE

PIE675N14E
60cm Induction Cooktop

Heating functions
4 induction cooking zones
17-stage power setting with PowerBoost for each zone

Convenience
Electronic DirectSelect 2.0 touch-controls
Dual timer with auto switch-off for each zone

Cleaning
WipeProtection pauses all settings for easy cleaning while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
606 x 527mm

For complete specifications see pg.56-57

LIFESTYLE

PIE651F17E
60cm Induction Cooktop

Heating functions
4 induction cooking zones
17-stage power setting with PowerBoost for each zone

Convenience
Electronic DirectSelect 1.0 touch-controls
Dual timer with auto switch-off for each zone
QuickStart
ReStart
Energy Consumption display

Cleaning
WipeProtection pauses all settings for easy cleaning while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
592 x 522mm

For complete specifications see pg.56-57

LIFESTYLE

PIL611B18E
60cm Induction Cooktop

Heating functions
3 induction cooking zones including XL 28cm cooking zone
17-stage power setting with PowerBoost for each zone

Convenience
TouchSelect electronic controls
Dual timer with auto switch-off for each zone
QuickStart
ReStart

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
592 x 522mm

For complete specifications see pg.56-57

CLASSIC

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Ceramic cooktops.

With their electronic touch-controls and extendable cooking zones, Bosch ceramic cooktops combine great looks with smart function and design. The smooth ceramic glass cooktop surface is tough and durable as well as being practical and easy-to-clean.







Dual circuit cooking zone
Available on selected ceramic cooktops, this energy-saving feature allows you to select a smaller cooking zone for small pans, and a larger zone for larger pans.

Extendable zone
Selected cooking zones can be extended giving you a much larger area to accommodate big saucepans, casserole and other (special) cooking dishes.

Automatic electronic boil start
The automatic electronic boil start heats the hotplate using the highest heat setting and then reverts down to the simmer setting you have previously selected, reducing the risk of boil overs.

QuickTherm technology
For improved control and flexibility, heat is delivered to the cooking zone in approximately three seconds. This feature is quicker than standard ceramic zones or electric-sealed plates.

PKC875N14A
80cm Ceramic Cooktop

Heating functions
4 QuickTherm cooking zones: 2 dual circuit zones, 1 dual circuit/extended roasting zone
17-stage power setting

Convenience
Electronic DirectSelect 2.0 touch-controls
Dual timer with auto switch-off for each zone
Automatic electronic boil start

Cleaning
WipeProtection pauses all settings for easy cleaning while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
816 x 527mm

For complete specifications see pg.56-57

LIFESTYLE

PKG775N14A
70cm Ceramic Cooktop

Heating functions
4 QuickTherm cooking zones:
2 dual circuit zone
17-stage power setting

Convenience
Electronic DirectSelect 2.0 touch-controls
Dual timer with auto switch-off for each zone
Automatic electronic boil start

Cleaning
WipeProtection pauses all settings for easy cleaning while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
710 x 527mm

For complete specifications see pg.56-57

LIFESTYLE

PKN675N14A
60cm Ceramic Cooktop

Heating functions
4 QuickTherm cooking zones: 1 dual circuit zones, 1 dual circuit/extended roasting zone
17-stage power setting

Convenience
Electronic DirectSelect 2.0 touch-controls
Dual timer with auto switch-off for each zone
Automatic electronic boil start

Cleaning
WipeProtection pauses all settings for easy cleaning while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
606 x 527mm

For complete specifications see pg.56-57

LIFESTYLE

PKF645D17A
60cm Ceramic Cooktop

Heating functions
4 QuickTherm cooking zones:
1 dual circuit zone
17-stage power setting

Convenience
Electronic TouchSelect +/- touch-controls
Dual timer with auto switch-off for each zone
ReStart

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
583 x 513mm

For complete specifications see pg.56-57

CLASSIC

PKE645C17A
60cm Ceramic Cooktop

Heating functions
4 QuickTherm cooking zones
9-stage power setting

Convenience
Rotary control knobs

Dimensions (WxD)
583 x 513mm

For complete specifications see pg.56-57

CLASSIC

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Gas Cooktops.

Our German-designed gas cooktops are available in a range of different styles, and conveniently come with controls that are either front or side mounted.

Design

Slim profile
Finished in black tempered glass, our Bosch Premium gas cooktops provide a stylish and sleek look.

Control dials
The control dials match the design of our range of ovens so that you can perfectly coordinate your appliances.

Cast-iron supports
Cast-iron pan supports are both stylish and highly durable, providing solid and robust support for your cooking pans.

Stainless steel finish

Tempered glass finish

Convenience

High-power wok-style burner
Selected gas cooktop models feature a powerful wok-style burner, which provides up to 18Mj/h. Suitable for use with flat-based pans or with a wok using the wok ring provided.

One-hand ignition
Push and turn the ergonomically designed control knobs and the gas ignites automatically. As well as offering the convenience of only using one-hand, there is also no separate ignition button to clean.

Flexible burners
All our gas cooktops feature different burner combinations for greater flexibility. With wok, high-speed, standard and economy burners, you can cook more efficiently with the burner most suited to the size of the pan.

Safety

Flame failure device
For added safety, all Bosch gas cooktops feature a flame failure device. This feature stops the supply of gas to the burners if the flame is extinguished.

PREMIUM ★ ★ ★ ★ ★

Premium models with exceptional cutting-edge features and extras. With a tempered glass base, these cooktops are complemented by a frameless finish. Available with up to five burners, these cooktops are available in 60 or 70cm.

LIFESTYLE ★ ★ ★ ★ ☆

Mid-range models with a broad range of extra features and benefits. With a stainless steel base, all models offer a flame failure device. Other features include up to six burners, a dedicated wok burner for high intensity cooking and cast-iron pan supports.

CLASSIC ★ ★ ★ ☆ ☆

Simple and practical models offering Bosch build quality and value for money. Excellent four burner cooktops, including features such as electronic ignition, wok-style burners and a flame failure device.

Gas Cooktops.

The cooktop of choice in most professional kitchens, modern gas cooktops are as stylish as they are practical.

PPQ716B21A
70cm Black Tempered Glass Gas Cooktop

Heating functions
5 burners: 1 x 16Mj/h triple flame wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner

Convenience
One-hand ignition via control knobs
Enamelled cast-iron pan supports

Safety
Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)
710 x 520mm

Other
Suitable for NG or LPG

For complete specifications see pg.58-59

PREMIUM

PPH616B21A
60cm Black Tempered Glass Gas Cooktop

Heating functions
4 burners: 1 x 12Mj/h dual flame wok burner, 2 standard burners, 1 economy burner

Convenience
One-hand ignition via control knobs
Enamelled cast-iron pan supports

Safety
Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)
590 x 520mm

Other
Suitable for NG or LPG

For complete specifications see pg.58-59

PREMIUM

PCT915B9TA
90cm Stainless Steel Gas Cooktop

Heating functions
6 burners: 2 x 18Mj/h dual flame wok burner, 2 standard burners, 2 economy burners

Convenience
One-hand ignition via control knobs
Enamelled cast-iron pan supports

Safety
Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)
915 x 520mm

Other
Suitable for NG or LPG

For complete specifications see pg.58-59

LIFESTYLE

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

PCR915B91A
90cm Stainless Steel Gas Cooktop

Heating functions
5 burners: 1 x 18Mj/h triple flame wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner

Convenience
One-hand ignition via control knobs
Enamelled cast-iron pan supports

Safety
Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)
915 x 520mm

Other
Suitable for NG or LPG

For complete specifications see pg.58-59

LIFESTYLE

PCQ715B90A
70cm Stainless Steel Gas Cooktop

Heating functions
5 burners: 1 x 16Mj/h triple flame wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner

Convenience
One-hand ignition via control knobs
Enamelled cast-iron pan supports

Safety
Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)
702 x 520mm

Other
Suitable for NG or LPG

For complete specifications see pg.58-59

LIFESTYLE

PCI815B91A
75cm Stainless Steel Gas Cooktop

Heating functions
4 burners: 1 x 16Mj/h dual flame wok burner, 1 high-speed burner, 1 standard burners, 1 economy burner

Convenience
One-hand ignition via control knobs
Enamelled cast-iron pan supports

Safety
Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)
762 x 520mm

Other
Suitable for NG or LPG

For complete specifications see pg.58-59

LIFESTYLE

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Gas Cooktops.

The cooktop of choice in most professional kitchens, modern gas cooktops are as stylish as they are practical.

PCH615B9TA
60cm Stainless Steel Gas Cooktop

Heating functions
4 burners: 1 x 18Mj/h dual flame wok burner, 1 high-speed burner, 1 standard burners, 1 economy burner

Convenience
One-hand ignition via control knobs
Enamelled cast-iron pan supports

Safety
Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)
582 x 520mm

Other
Suitable for NG or LPG

For complete specifications see pg.58-59

LIFESTYLE

PBH615B9TA
60cm Stainless Steel Gas Cooktop

Heating functions
4 burners: 1 x 18Mj/h dual flame wok burner, 2 standard burners, 1 economy burner

Convenience
One-hand ignition via control knobs
Enamelled cast-iron pan supports

Safety
Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)
580 x 510mm

Other
Suitable for NG or LPG

For complete specifications see pg.58-59

CLASSIC

PBH615B80A
60cm Stainless Steel Gas Cooktop

Heating functions
4 burners: 1 x 12Mj/h dual flame wok burner, 2 standard burners, 1 economy burner

Convenience
One-hand ignition via control knobs
Enamelled steel pan supports

Safety
Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)
580 x 510mm

Other
Suitable for NG or LPG

For complete specifications see pg.58-59

CLASSIC

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Rangehoods.

With a wide variety of sizes, types and finishes to choose from, it's easy to find the right Bosch rangehood to perfectly suit your kitchen's design.

Box style
Chimney hoods in a box design are available in slim or super-slim versions. Included in the range are models with beveled lower edges for a really super-slim appearance.

Curved glass
Metal and glass for a contemporary look, curved to give smooth lines.

Pyramid
Impress with classic lines and gently inclined contours.

Integrated
Neatly concealed rangehoods.

Slideout
Extends when in use and slides neatly away when not in operation.

PREMIUM

The premium model offers exceptional cutting-edge features such as the EcoSilence Drive® brushless motor for superior and quiet operation. Beautifully functional, perfect in form, it's designed to be the focal point of your kitchen. Two intensive settings and the automatic run-on facility makes sure that any remaining vapours and odours are whisked away, while the saturation indicator warns you when it's time to clean the filters.

LIFESTYLE

Mid-range models with a broad range of extra features and benefits. Stylish and practical yet quiet. Selected models are electronically controlled and feature electronic displays and control keys. The intensive setting is ideal for intensive cooking such as stir-frys.

CLASSIC

Simple and practical models offering Bosch build quality and value for money. Three power settings and halogen illumination offer the esentials for any kitchen.

Rangehoods.

New

Why shout when you can whisper?
Relax in a quieter kitchen with family and friends

The new EcoSilence Drive® motor operates without carbon brushes, eliminating the disadvantages of conventional motors. Instead of energy loss, wear and noise, you get efficiency, durability, and smooth operation. To reduce motor noise even further, we have optimised the airflow inside the hood. The result: low noise levels with high power.

Design

Halogen lighting
Integrated halogen lighting ensures that the cooking area is clearly illuminated. They are more efficient than standard lights and are designed to last longer.

LED lighting
New
The new LED lights offer a longer lifetime and use less energy than conventional halogen lighting. Additional convenience is offered with SoftLight which gently fades lighting in and out with dimmer function.

Electronic control
3 power levels + 2 additional intensive settings, automatic run-on, filter saturation indicator, automatic power revert and SoftLight with dimmer function, control at your fingertips.

Electronic button control
This control provides you with 3 power levels + 1 intensive setting. There's also a push-button for turning the lights on and off. And to make operation even easier, the buttons are back-lit.

Rocker switch control
It doesn't get any easier: 3 push-buttons for 3 power levels and one for turning the lights on and off.

Convenience

Variable power settings
All Bosch rangehoods feature variable power settings, which can be set to effectively remove odours, smoke and moisture caused by cooking. Many models also feature an intensive extraction setting, which gives an extra boost to the performance when required.

Automatic run-on
Selected Bosch rangehoods automatically continue to run-on for approximately 10 minutes after normal operation to ensure remaining odours are removed. The rangehood then automatically switches off.

Automatic power revert
When the intensive setting is selected, it can be set to automatically revert to a pre-defined setting after a short period of time.

Electronic filter saturation indicator
For maximum extraction efficiency, an illuminated light indicates when the filter needs cleaning. For hassle-free cleaning, the one-piece filter can be loaded into your Bosch dishwasher.

Dishwasher-safe metal filters
For easy cleaning, all Bosch filters can be safely loaded into any Bosch dishwasher for sparkling clean results.

Rim ventilation filter
With its smooth uninterrupted surface and grease separation of 80-92%*, the rim ventilation filter from Bosch has a multipatented filter sealing system and flow-optimised filter system with 12-layer filter mats.

*Depending on motor output



Stainless steel filter
The stainless steel filter provides an exceptionally high level of grease absorption. It is concealed behind an elegant stainless steel cover with a stainless steel handle.

Metal grease filter
Metal grease filters are required for ducted and recirculating systems to filter grease and other solid particles out of the extracted air. To make sure these filters operate at maximum efficiency, they should be cleaned about twice a month.

Rangehoods.

What extraction rate do I need?
It is recommended that air be extracted (or exchanged) in a room depending on your type of cooking: minimum of 6 times per hour; and a maximum of 12 times per hour.

Air Extraction is measured using room volume. This is calculated by multiplying Length x Width x Height.

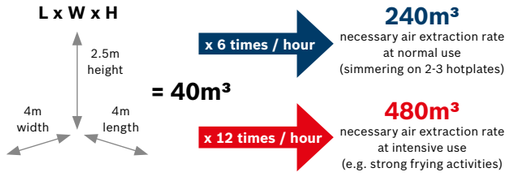
L x W x H
2.5m height
4m width
4m length
= 40m³
x 6 times / hour
240m³
necessary air extraction rate at normal use (simmering on 2-3 hotplates)
x 12 times / hour
480m³
necessary air extraction rate at intensive use (e.g. strong frying activities)

Bosch extraction rates are tested inline with EU standards.
See page 60-61 for more information.

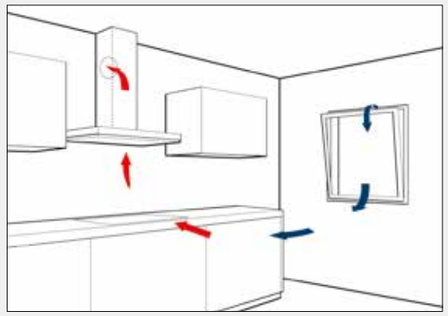

Ducted extraction
Ducting out is the most effective method of extraction. Ideally the rangehood should be sited on an outside wall, or an outside wall can be reached via ducting. All Bosch extractors are now standardised to facilitate a 150mm diameter outlet for maximum performance, although smaller ducting can be used if required. Please refer to the installation guide for further advice on best practice installation.

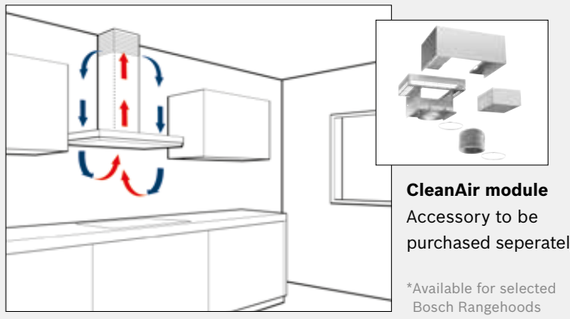

CleanAir module
Accessory to be purchased seperately*

*Available for selected Bosch Rangehoods

Recirculation kit
Odours are extracted and filtered, then purified air is returned to the room. The kit comprises of a carbon filter and all components needed to ensure that odour free air is returned into the kitchen. To maintain performance, the carbon filter should be replaced on a regular basis. A recirculation kit needs to be purchased as a separate accessory.

DWA097E51A
90cm Wall-Mounted Stainless Steel Canopy Rangehood with Glass Screen

Power functions
690m³/h maximum extraction capacity
3 power settings + 2 intensive settings with automatic revert to previous setting
Automatic run-on time 1-10 mins
EcoSilence Drive® brushless BLDC motor

Convenience
Whisper-quiet: 54dB at level 2 or 350m³/h (150mm ducted)
Electronic controls with LED display
2 x 3W LED SoftLights with dimmer function

Cleaning
Dishwasher-safe metal grease filters
Electronic filter saturation indicator

Dimensions (HxWxD)
638-954 x 900 x 540mm (ducted) or 694 x 900 x 540mm (CleanAir module)

For complete specifications see pg.60-61

690 m³/h Extraction capacity | EcoSilence Drive | Automatic run-on | Whisper quiet | LED Lighting | Saturation Indicator

PREMIUM ★ ★ ★ ★ ★

DWB091E51A
90cm Wall-Mounted Stainless Steel Canopy Rangehood

Power functions
810m³/h maximum extraction capacity with rim ventilation
3 power settings + 2 intensive settings with automatic revert to previous setting
Automatic run-on time 1-10 mins
EcoSilence Drive® brushless BLDC motor

Convenience
Whisper-quiet: 59dB at level 2 or 430m³/h (150mm ducted)
Sound insulation mats
Electronic controls with LED display
3 x 3W LED SoftLights with dimmer function

Cleaning
Dishwasher-safe metal grease filters
Electronic filter saturation indicator

Dimensions (HxWxD)
628-954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir module)

For complete specifications see pg.60-61

810 m³/h Extraction capacity | EcoSilence Drive | Automatic run-on | Whisper quiet | Sound insulation mats | LED Lighting | Saturation Indicator

PREMIUM ★ ★ ★ ★ ★

DWB097E50A
90cm Wall-Mounted Stainless Steel Canopy Rangehood

Power functions
730m³/h maximum extraction capacity
3 power settings + 2 intensive settings with automatic revert to previous setting
Automatic run-on time 1-10 mins

Convenience
Whisper-quiet: 49dB at level 2 or 360m³/h (150mm ducted)
Sound insulation mats
Electronic controls with LED display
3 x 3W LED SoftLights with dimmer function

Cleaning
Dishwasher-safe metal grease filters
Electronic filter saturation indicator

Dimensions (HxWxD)
642-954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir module)

For complete specifications see pg.60-61

730 m³/h Extraction capacity | EcoSilence Drive | Automatic run-on | Whisper quiet | Sound insulation mats | LED Lighting | Saturation Indicator

PREMIUM ★ ★ ★ ★ ★

DWW097A50A
90cm Wall-Mounted Stainless Steel Canopy Rangehood

Power functions
730m³/h maximum extraction capacity
3 power settings + 1 intensive setting with automatic revert to previous setting
EcoSilence Drive® brushless BLDC motor

Convenience
Whisper-quiet: 49dB at level 2 or 360m³/h (150mm ducted)
Sound insulation mats
Electronic button control
3 x 3W LED lights

Cleaning
Dishwasher-safe metal grease filters

Dimensions (HxWxD)
622-954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir module)

For complete specifications see pg.60-61

730 m³/h Extraction capacity | EcoSilence Drive | Whisper quiet | Sound insulation mats | LED Lighting

LIFESTYLE ★ ★ ★ ★ ★

DWW09W851A
90cm Wall-Mounted Stainless Steel Canopy Rangehood

Power functions
780m³/h maximum extraction capacity
3 power settings

Convenience
Very quiet: 59dB at level 2 or 450m³/h (150mm ducted)
Rocker switch controls for power & lights
2 x 20W halogen lights

Cleaning
Dishwasher-safe metal grease filters

Dimensions (HxWxD)
799-976 x 900 x 500mm (ducted or recirculated)

For complete specifications see pg.60-61

780 m³/h Extraction capacity | Very quiet | Hallogen Lighting

CLASSIC ★ ★ ★ ★ ★

DWW06W851A
60cm Wall-Mounted Stainless Steel Canopy Rangehood

Power functions
730m³/h maximum extraction capacity
3 power settings

Convenience
Very quiet: 59dB at level 2 or 420m³/h (150mm ducted)
Rocker switch controls for power & lights
2 x 20W halogen lights

Cleaning
Dishwasher-safe metal grease filters

Dimensions (HxWxD)
799-976 x 600 x 500mm (ducted or recirculated)

For complete specifications see pg.60-61

730 m³/h Extraction capacity | Very quiet | Hallogen Lighting

CLASSIC ★ ★ ★ ★ ★

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Rangehoods.

DHL555BAU
53cm Integrated Rangehood

Power functions
710m³/h maximum extraction capacity
3 power settings + 1 intensive setting

Convenience
Very quiet: 52dB at level 2 or 320m³/h (150mm ducted)
Slide controls for power & light
2 x 20W halogen lights

Cleaning
Dishwasher-safe metal grease filters

Dimensions (HxWxD)
255 x 530 x 380mm (ducted or recirculated)

For complete specifications see pg.60-61

DHI955FAU
90cm Slideout Rangehood

Power functions
830m³/h maximum extraction capacity
3 power settings + 1 intensive setting

Convenience
Very quiet: 51dB at level 2 or 350m³/h (150mm ducted)
Slide controls for power & light
3 x 20W halogen lights

Cleaning
Dishwasher-safe metal grease filters

Dimensions (HxWxD)
475 x 897 x 273mm (ducted or recirculated)
(Fits 60cm or 90cm cupboard)

For complete specifications see pg.60-61

DHI755FAU
70cm Slideout Rangehood

Power functions
820m³/h maximum extraction capacity
3 power settings + 1 intensive setting

Convenience
Very quiet: 51dB at level 2 or 350m³/h (150mm ducted)
Slide controls for power & light
2 x 20W halogen lights

Cleaning
Dishwasher-safe metal grease filters

Dimensions (HxWxD)
475 x 897 x 273mm (ducted or recirculated)

For complete specifications see pg.60-61

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

DHI655NAU
60cm Slideout Rangehood

Power functions
490m³/h maximum extraction capacity
3 power settings + 1 intensive setting

Convenience
Very quiet: 56dB at level 2 or 300m³/h (150mm ducted)
Slide controls for power & light
2 x 20W halogen lights

Cleaning
Dishwasher-safe metal grease filters

Dimensions (HxWxD)
465 x 597 x 273mm (ducted or recirculated)

For complete specifications see pg.60-61

DHI635KAU
60cm Slideout Rangehood

Power functions
400m³/h maximum extraction capacity
3 power settings

Convenience
Quiet: 61dB at level 2 or 310m³/h (120mm ducted)
Rocker switches for power & light
2 x 30W halogen lights

Cleaning
Dishwasher-safe metal grease filters

Dimensions (HxWxD)
354 x 598 x 280mm (ducted or recirculated)

For complete specifications see pg.60-61

DHI625NAU
60cm Slideout Rangehood

Power functions
220m³/h maximum extraction capacity
3 power settings

Convenience
Quiet: 60dB at level 2 or 170m³/h (150mm ducted)
Rocker switches for power & light
2 x 30W halogen lights

Cleaning
Dishwasher-safe metal grease filters

Dimensions (HxWxD)
252 x 598 x 280mm (ducted or recirculated)

For complete specifications see pg.60-61

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide Ovens.

Product overview		Single ovens										Double ovens	
Model	**Features**	**HBG73S550A**	**HBA63S451A**	**HBA63B250A**	**HBL43S450A**	**HBR43S450A**	**HBG43S450A**	**HBG43S420A**	**HBA13B254A**	**HBA13B253A**	**HBX33R51**	**HBM43S550A**	**HBM43B250A**
Dimensions	Width (cm)	**60**	**60**	**60**	**60**	**60**	**60**	**60**	**60**	**60**	**90**	**60**	**60**
	Appliance dimensions (HxWxD)	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 515mm	480 x 896 x 566mm	888 x 595 x 550mm	888 x 595 x 550mm
	Built-in dimensions (HxWxD)	575-597 x 560 x 550mm	575-597 x 560 x 550mm	575-597 x 560 x 550mm	575-597 x 560 x 550mm	575-597 x 560 x 550mm	575-597 x 560 x 550mm	575-597 x 560 x 550mm	575-597 x 560 x 550mm	575-597 x 560 x 550mm	467-470 x 860-864 x 560mm	872-886 x 560-570 x 550mm	872-886 x 560-570 x 550mm
	Cavity dimensions (HxWxD)	329 x 482 x 405mm	329 x 482 x 405mm	329 x 482 x 405mm	329 x 482 x 420mm	329 x 482 x 420mm	329 x 482 x 420mm	329 x 482 x 420mm	329 x 482 x 420mm	329 x 482 x 387mm	308 x 615 x 405mm	172 x 468 x 433mm (top); 329 x 482 x 418mm (bottom)	172 x 468 x 433 (top); 329 x 482 x 418mm (bottom)
Heating Functions	Number of heating functions	9	6	6	5	5	5	5	4	4	8	3 (top) + 5 (bottom)	2 (top) + 5 (bottom)
	3D HotAir Plus	●	●	●	●	●	●	●	●			● (bottom)	● (bottom)
	Fan-forced hot air									●	●		
	HotAir Eco	●	●	●									
	Top/bottom heating	●	●	●	●	●	●	●			●	● (top & bottom)	● (top & bottom)
	Fan assisted top/bottom heating										●		
	Bottom heating	●	●	●	●	●	●	●				● (bottom)	● (bottom)
	Fan assisted bottom heating										●		
	Hot air grilling	●	●	●	●	●	●	●	●	●	●	● (bottom)	● (bottom)
	Grill - large area	●	●	●	●	●	●	●	●	●	●	● (top & bottom)	● (top & bottom)
	Grill - small area	●									●	● (top)	
	Pizza setting	●									●		
	Defrost	●							●	●			
	Automatic rapid heat function	●	●	●	●	●	●	●				●	●
	Electronic thermostat	●	●	●									
Capacity	Volume (usable litres)	65 litres (net)	65 litres (net)	65 litres (net)	67 litres (net)	67 litres (net)	67 litres (net)	67 litres (net)	67 litres (net)	62 litres (net)	77 litres (net)	35 litres (net) top 67 litres (net) bottom	35 litres (net) top 67 litres (net) bottom
Design		Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	White with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle
	Cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Enamel cavity	Grey enamel cavity	Grey enamel cavity
	Electronic touch-control clock/timer with LED display and end-time programming	●	●	●	●	●	●	●	●	●		●	●
	Electronic clock/timer										●		
	Retractable rotary control knobs	●	●		●	●	●	●				●	
	Rotary control knobs								●		●		
	Sword control knobs			●						●			●
	SoftClose technology	●					●	●					
	Interior light	●	●	●	●	●	●	●	●	●	2 (left and right side walls)	1 (top) + 1 (bottom)	1 (top) + 1 (bottom)
	No. of shelf positions	5	5	5	5	5	5	5	5	5	4	2 (top) + 5 (bottom)	2 (top) + 5 (bottom)
	Full glass inner door	●	●	●	●	●	●	●	●	●		●	●
	Removable door	●	●	●	●	●	●	●	●	●	●	●	●
	Hinged door				Left hinged door	Right hinged door							
Cleaning	Pyrolytic cleaning function	●	●	●									
	Pyrolytic compatible accessories	●	●	●									
	EcoClean cleaning system in ceiling, sides and rear wall				●	●	●	●				● (top & bottom)	● (top & bottom)
	EcoClean cleaning system in ceiling and rear wall								●				
	EcoClean cleaning system in rear wall									●			
	Catalytic cleaning system in side walls										●		
Safety	Quadruple-glazed CoolTouch Door	●	●	●									
	Triple-glazed door				●	●	●	●	●	●		● (top & bottom)	● (top & bottom)
	Double-glazed door										●		
	Automatic safety switch off	●	●	●									
	Child lock function	●	●	●	●	●	●	●	●	●		●	●
	Cooling fan	●	●	●	●	●	●	●	●	●	●	●	●
Technical requirements	Maximum temperature	300°C	300°C	300°C	270°C	270°C	270°C	270°C	270°C	270°C	250°C	275°C	275°C
	Total connected load	3.65kW	3.65kW	3.65kW	3.5kW	3.5kW	3.5kW	3.5kW	2.9kW	2.2kW	3.3kW	5.5kW	5.5kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
Supplied accessories	2-level telescopic rails	●	●		●	●	●	●				● (bottom)	
	No. wire racks	2	2	2	2	2	2	2	2	2	2	3	3
	No. split grill trays - pyrolytic cleaning compatible	1	1	1									
	No. universal trays - pyrolytic cleaning compatible	1	1										
	No. baking trays - pyrolytic cleaning compatible	1	1	1									
	1 pair pyrolytic pan supports	●	●	●									
	No. split grill trays				1	1	1	1	1			2	1
	No. universal pans				1	1	1	1	1	2		2	1
	No. baking trays				1	1	1	1	1		2	1	1
Optional accessories		Refer to page 62-63	Refer to page 62-63	Refer to page 62-63	Refer to page 62-63	Refer to page 62-63	Refer to page 62-63	Refer to page 62-63	Refer to page 62-63	Refer to page 62-63		Refer to page 62-63	Refer to page 62-63

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide
Freestanding Cookers.

Product overview		Freestanding Cookers		
Model	**Features**	**HSB738356A**	**HGV74W355A**	**HCE858451A**
Type		**Gas / Electric**	**Gas / Electric**	**Induction / Electric**
Dimensions	Width (cm)	**90**	**60**	**60**
	Appliance dimensions (HxWxD)	845-880 x 898 x 600mm	900 x 600 x 600mm	900 x 600 x 600mm
	Cavity dimensions (HxWxD)	339 x 665 x 433mm	329 x 482 x 420mm	329 x 482 x 420mm
Oven specifications				
Heating Functions	Number of heating functions	8	8	10
	3D HotAir Plus		●	●
	Fan-forced hot air	●		
	HotAir Eco			●
	Top/bottom heating	●	●	●
	Fan assisted top/bottom heating	●		
	Bottom heating	●	●	●
	Hot air grilling	●	●	●
	Grill - large area	●	●	●
	Grill - small area	●	●	●
	Pizza setting		●	●
	Defrost	●	●	●
	AutoPilot automatic programs			● (40)
	Memory function			●
	Automatic rapid heat function		●	●
	Electronic thermostat			●
	Sabbath program			●
Capacity	Volume (usable litres)	112 litre (net)	67 litre (net)	67 litre (net)
Design		Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle
	Electronic touch-control clock/timer with LED display and end-time programming	●	●	●
	Retractable rotary control knobs			●
	Rotary control knobs	●	●	
	SoftClose technology		●	●
	Interior light	2	●	●
	No. of shelf positions	4	5	5
	Full glass inner door		●	●
	Removable door	●	●	●
	Height adjustable	● (by 35mm)	● (by 15mm)	● (by 15mm)
	1-level telescopic rails	●		
	2-level telescopic rails		●	
	Other	Storage compartment	Utensil drawer	Utensil drawer
Cleaning	Pyrolytic cleaning function			
	Pyrolytic compatible accessories			
	EcoClean cleaning system in ceiling, side walls and rear wall		●	
	Catalytic cleaning system in rear and side walls	●		
Safety	Quadruple-glazed CoolTouch Door			●
	Triple-glazed door	●	●	
	Double-glazed door			
	Automatic safety switch off			●
	Child lock function	●	●	●
	Cooling fan	●	●	●
Supplied accessories	No. wire racks	2	2	2
	No. split grill trays - pyrolytic cleaning compatible			1
	No. baking trays - pyrolytic cleaning compatible			1
	No. universal pans - pyrolytic cleaning compatible			1
	No. split grill trays		1	
	No. universal pans		1	
	No. solid baking trays	1	1	

Product overview		Freestanding Cookers		
Model	**Features**	**HSB738356A**	**HGV74W355A**	**HCE858451A**
Type		**Gas / Electric**	**Gas / Electric**	**Induction / Electric**
Cooktop specifications				
Burner / Zone Output (Size)		6 burners including:	4 burners including:	4 zones including:
	Front left	Triple flame wok burner: 14Mj/h	Wok burner: 12Mj/h	Standard zone: 1.8kW (180mm)
	Rear left	Standard burner: 7Mj/h	Standard burner: 6.5Mj/h	Standard zone: 1.8kW (180mm)
	Front centre	High-speed burner: 11Mj/h		
	Rear centre	Economy burner: 4Mj/h		
	Front right	Economy burner: 4Mj/h	Economy burner: 3.6Mj/h	Standard zone: 2.2kW (220mm)
	Rear right	Standard burner: 7Mj/h	Standard burner: 6.5Mj/h	Standard zone: 1.4kW (145mm)
	17-stage power setting			●
	PowerBoost			●
Cooktop Design		Stainless steel gas cooktop	Stainless steel gas cooktop	Ceramic glass induction cooktop
	3-pc cast-iron trivets with rubber feet	●		
	2-pc cast-iron trivets with rubber feet		●	
	Enamelled burner caps	●	●	
Cooktop Electronic touch-controls	Electronic -/+ touch-controls & timer for each zone			●
	One-hand electronic ignition	●	●	
Cooktop Cleaning	WipeProtection			●
Cooktop Safety	Flame failure fitted to each burner	●	●	
	2-stage residual heat indicators			●
	Child lock			●
	Automatic safety switch off			●
Supplied accessories	LPG conversion kit	●	●	
	Wok ring support	1		
	Cross support for Espresso	1		
Optional accessories		Refer to page 62-63	Refer to page 62-63	Refer to page 62-63
Technical requirements	Maximum temperature (oven)	260°C	300°C	300°C
	Total connected load	3.2kW total connected load; 47Mj/h total gas connected load	3.2kW total connected load; 28.6Mj/h total gas connected load	10.9kW total connected load
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	Other	Suitable for NG and LPG	Suitable for NG and LPG	

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide Compact Appliances.

Product overview					
Model	**Features**	**HBC34D554P**	**HBC24D553P**	**HBC84K553A**	**HMT35M653A**
Type		**Combination Steam Oven**	**Pure Steam Oven**	**Combination Microwave Oven**	**Microwave Oven**
Dimensions	**Width (cm)**	**60**	**60**	**60**	**60**
	Appliance dimensions (HxWxD)	454 x 595 x 550mm	454 x 595 x 550mm	454 x 595 x 531mm	454 x 595 x 563mm
	Built-in dimensions (HxWxD)	450 x 560 x 550mm	450 x 560 x 550mm	450 x 560 x 550mm	450 x 560 x 550mm
	Cavity dimensions (HxWxD)	245 x 355 x 400mm	265 x 325 x 439mm	226 x 424 x 366mm	242 x 430 x 345mm
Heating Functions	Number of heating functions	4	2	5	
	3D HotAir Plus				
	Fan-forced hot air	●		●	
	Fan-forced hot air and steam combination	●			
	Top/bottom heating			●	
	Bottom heating				
	Hot air grilling			●	
	Grill - large area			●	
	Grill - small area				
	Pizza setting				
	Defrost		●		
	Reheat	●			
	Pure steam cooking	●	●		
	Microwave with INNOWAVE inverter technology			●	●
	AutoPilot automatic programs	● (40)	● (20)	● (20 incl defrost)	● (9 incl defrost)
	3-stage programming			●	●
	Memory function				● (2)
Capacity	Volume (usable litres)	35 litres (net)	38 litres (net)	42 litres (net)	36 litres (net)
	1.3L water tank (steam ovens only)	●	●		
Design		Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle
	Cavity	Stainless steel cavity	Stainless steel cavity	Grey enamel cavity	Stainless steel cavity
	Electronic touch-control clock/ timer with LED display and end-time programming	●	●	●	●
	Retractable rotary control knobs	●	●	●	●
	Interior light	●	●	●	●
	No. of shelf positions	4	4	3	
	Removable door	●	●		
	Other	Water tank empty indicator	Water tank empty indicator	90 minutes maximum time setting	99 minutes maximum time setting
Cleaning	EcoClean cleaning system in ceiling, sides and rear wall				
	EcoClean cleaning system in rear wall			●	
	Steam cleaning system	●			
	Descaling program	●	●		
Safety	Triple-glazed door	●			
	Double-glazed door		●	●	
	Automatic safety switch off	●	●		
	Child lock function	●	●	●	
	Cooling fan	●	●		
Technical requirements	Maximum temperature	230°C maximum fan-forced hot air temperature; 35-100°C steam temperature	35-100°C steam temperature	250°C maximum temperature; 900W maximum microwave power output with 5 power levels: 90/180/360/600/900W	5 power levels: 90/180/360/600/1000W
	Total connected load	1.9kW	1.9kW	3.6kW	1.2kW
	Power requirements	220-240V / 50Hz	220-240V / 50Hz	230-240V / 50Hz	230-240V / 50Hz
Supplied accessories	No. wire racks	1		1	
	No. split grill trays				
	No. universal pans			1	
	No. solid baking trays	2	1		
	No. perforated baking trays	2	1		
	No. glass baking trays			1	
	Cleaning sponge	●	●		
Optional accessories		Refer to page 62-63	Refer to page 62-63	Refer to page 62-63	Refer to page 62-63

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide Coffee machine.

Product overview		
Model	**Features**	**TCC78K751A**
Type		**Stainless Steel Fully Automatic Built-In Espresso Machine**
Dimensions	Appliance dimensions (HxWxD)	454 x 595 x 535mm
	Built-in dimensions (HxWxD)	450 x 564 x 514mm
Design		Twin LED display with metal touch-controls
	Innovative SensoFlow heating system	●
	Innovative brewing technology with AromaPro concept	●
	High-quality CreamPro concept milk nozzle with suction function	●
	Intelligent AutoValve system switches automatically between steam and hot water	●
	SilentCeram drive ceramic grinding unit	●
	Sound absorption for noise reduction	●
	Illuminated coffee outlet	●
	Bean container with aroma protection lid for up to 1kg	●
	Water pump with 19 bar pressure	●
Beverages	One touch function for Latte, Macchiato, Cappuccino, Milk Coffee and 'My Coffee'	●
	Personalised 'My Coffee' function	●
	Pre-brewing function	●
	Fully programmable functions including grinding grade, cup size, strength and temperature	●
	Milk froth, warm milk and hot water separately available	●
	Height-adjustable coffee and milk outlet (max 150mm)	●
Convenience	Early warning of bean container and water tank close to empty	●
	Bean container and water tank empty indicator	●
	Removable brewing unit and 2.5L water tank	●
	One touch button to eject chassis automatically, for easy access to bean container, grinder and water tank	●
Cleaning	Fully automatic-descaling and cleaning program	●
	Fully automatic rinse cycle when switched on and off	●
	Hygienic single portion cleaning function	●
	Quick rinse milk system	●
	Removable milk nozzle for easy cleaning (dishwasher-safe)	●
	Display of remaining cups before cleaning or descaling	●
Technical requirements		Electrical connection rating 1700W; Current: 10A
	Voltage	220-240V / 50-60Hz
Supplied accessories	1 BRITA water filter cartridge	●
	1 measuring spoon	●
	1 milk container and hose	●
	1 set assembly screws	●

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide Warming drawers.

Product overview			
Model	**Features**	**HSC290652A**	**HSC140652A**
Type		**60cm Built-in Warming Drawer**	**60cm Built-in Warming Drawer**
Dimensions (HxWxD)	Appliance dimensions	290 x 595 x 544mm	141 x 595 x 544mm
	Built-in dimensions	290 x 560 x 550mm	141 x 560 x 550mm
	Internal dimensions	245 x 465 x 457mm	95 x 465 x 457mm
Heating functions	Bottom and fan heating 4 settings incl base and fan heating	●	●
Suitable for	Slow cooking	●	●
	Proving yeast dough	●	●
	Defrosting	●	●
	Keeping food warm	●	●
	Pre-warming cups, plates and ovenware	●	●
Temperature range	from approx. 30-80°C	●	●
Design		Stainless steel with metal bar handle	Stainless steel with metal bar handle
	Cavity	52 litre interior drawer volume	20 litre interior drawer volume
	Electronic rotary temperature control	●	●
	Inner compartment Ceramic glass base element made of stainless steel	●	●
Technical requirements	Max. weight load	25kg	25kg
	Total connected load	0.81kW	0.81kW
	Voltage	220–240V / 50-60Hz	220–240V / 50-60Hz

Reference Guide
Electric Cooktops.

Product overview		FlexInduction		CombiInduction®		Induction						Ceramic				
Model	**Features**	**PIN875N17E**	**PIN675N17E**	**PIT851F17E**	**PIT651F17E**	**PIM851F17E**	**PIE775N14E**	**PIE675N14E**	**PIE651F17E**	**PIL611B18E**	**PKC875N14A**	**PKG775N14A**	**PKN675N14A**	**PKF645D17A**	**PKE645C17A**
Dimensions	Width (cm)	**80**	**60**	**80**	**60**	**80**	**70**	**60**	**60**	**60**	**80**	**70**	**60**	**60**	**60**
	Appliance dimensions (WxD)	816 x 527mm	606 x 527mm	802 x 522mm	592 x 522mm	802 x 522mm	710 x 527mm	606 x 527mm	592 x 522mm	592 x 522mm	816 x 527mm	710 x 527mm	606 x 527mm	583 x 513mm	583 x 513mm
	Cut-out dimensions (WxD)	750-780 x 490-500mm	560 x 490-500mm	750 x 490-500mm	560 x 490-500mm	750 x 490-500mm	560 x 490-500mm (fits cut-out for 60cm)	560 x 490-500mm	560 x 490-500mm	560 x 490-500mm	780 x 500mm	560-640 x 490-500mm (fits cut-out for 60cm)	560 x 500mm	560 x 490-500mm	560 x 490-500mm
Design		Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Beveled front and sides	Black ceramic glass Beveled front and sides	Black ceramic glass Beveled front and sides	Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Beveled front and sides	Black ceramic frameless glass	Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Stainless steel frame	Black ceramic glass Stainless steel frame
Burner / Zone Output (Size)		4 zones including:	4 zones including:	4 zones including:	4 zones including:	5 zones including:	4 zones including:	4 zones including:	4 zones including:	3 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:
	Front left	FlexZone: 2.0kW / 2.5kW Boost (200x240mm)	FlexZone: 2.0kW / 2.5kW Boost (200x240mm)	CombiZone: 2.2kW / 3.6kW Boost (210mm)	CombiZone: 2.2kW / 3.6kW Boost (210mm)	Standard zone: 1.8kW / 2.8kW Boost (180mm)	Standard zone: 1.8kW / 2.5kW Boost (180mm)	Standard zone: 1.8kW / 2.5kW Boost (180mm)	Standard zone: 1.8kW / 2.5kW Boost (180mm)		Dual circuit zone: 0.75kW / 2.2kW (120/210mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
	Rear left	FlexZone: 2.0kW / 2.5kW Boost (200x240mm)	FlexZone: 2.0kW / 2.5kW Boost (200x240mm)	CombiZone: 2.2kW / 3.6kW Boost (210mm)	CombiZone: 2.2kW / 3.6kW Boost (210mm)	Standard zone: 1.4kW / 1.8kW Boost (145mm)	Standard zone: 1.8kW / 2.5kW Boost (180mm)	Standard zone: 1.8kW / 2.5kW Boost (180mm)	Standard zone: 1.8kW / 2.5kW Boost (180mm)	Standard zone: 2.4kW / 3.5kW Boost (280mm)	Standard zone: 1.2kW (180mm)	Dual circuit zone: 0.8kW / 2.0kW (120/180mm)	Standard/roaster zone: 1.8kW / 2.6kW (170/265mm)	Standard zone: 2.0kW (180mm)	Standard zone: 2.2kW (210mm)
	Front centre														
	Rear centre					Standard zone: 2.2kW / 3.7kW Boost (240mm)					Dual circuit zone: 1.5kW / 2.4kW (180/230mm)				
	Front right	Standard zone: 1.4kW / 1.8kW Boost (145mm)	Standard zone: 1.4kW / 1.8kW Boost (145mm)	Standard zone: 1.4kW / 1.8kW Boost (145mm)	Standard zone: 1.8kW / 2.8kW Boost (180mm)	Standard zone: 2.2kW / 3.7kW Boost (210mm)	Standard zone: 2.2kW / 3.3kW Boost (210mm)	Standard zone: 2.2kW / 3.3kW Boost (210mm)	Standard zone: 2.2kW / 3.3kW Boost (210mm)	Standard zone: 2.2kW / 3.3kW Boost (210mm)	Dual circuit/roaster zone: 0.9kW / 1.75kW / 2.1kW (145/200/350mm)	Dual circuit zone: 0.75kW / 2.2kW (120/210mm)	Dual circuit zone: 0.75kW / 2.2kW (120/210mm)	Dual circuit zone: 0.75kW / 2.2kW (120/210mm)	Standard zone: 2.0kW (180mm)
	Rear right	Standard zone: 2.4kW / 3.6kW Boost (280mm)	Standard zone: 2.4kW / 3.6kW Boost (280mm)	Standard zone: 2.4kW / 3.7kW Boost (280mm)	Standard zone: 1.4kW / 1.8kW Boost (145mm)	Standard zone: 1.4kW / 1.8kW Boost (145mm)	Standard zone: 1.4kW / 1.8kW Boost (145mm)	Standard zone: 1.4kW / 1.8kW Boost (145mm)	Standard zone: 1.4kW / 1.8kW Boost (145mm	Standard zone: 1.4kW / 1.8kW Boost (145mm)		Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
		*Total FlexZone: 3.3kW / 3.6kW Boost (400x240mm)	*Total FlexZone: 3.3kW / 3.6kW Boost (400x240mm)												
Performance	17-stage power setting	●	●	●	●	●	●	●	●	●	●	●	●	●	
	9-stage power setting														●
	PowerBoost	●	●	●	●	●	●	●	●	●					
	FlexZone	●	●												
	CombiZone			●	●										
	MoveMode			●	●										
Convenience	WipeProtection	●	●	●	●	●	●	●	●		●	●	●		
	QuickStart			●	●	●			●	●					
	ReStart			●	●	●			●	●				●	
	Energy consumption display			●	●	●			●						
	Dual function timer with automatic switch-off	●	●	●	●	●	●	●	●	●	●	●	●		
	Automatic pot detection	●	●	●	●	●	●	●	●	●					
	Automatic boil start										●	●	●		
Safety	ChildLock	●	●	●	●	●	●	●	●	●	●	●	●	●	
	2-stage residual heat indicators	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Residual heat inducator														●
	Automatic safety stuff-off	●	●	●	●	●	●	●	●	●	●	●	●	●	
Electronic touch-controls	Direct Select 2.0	●	●				●	●			●	●	●		
	Direct Select 1.0			●	●	●			●						
	TouchSelect									●				●	
	Rotary control knobs														●
Technical requirements		7.2kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm if over oven: 30mm	7.2kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm if over oven: 30mm	7.2kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm if over oven: 30mm	6.8kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm if over oven: 30mm	7.2kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm if over oven: 30mm	7.2kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm if over oven: 30mm	7.2kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm if over oven: 30mm	7.2kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm if over oven: 30mm	4.6kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm if over oven: 30mm	7.9kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm over oven: 20mm	6.6kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm over oven: 20mm	7.2kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm over oven: 20mm	6.6kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm over oven: 20mm	6.6kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm over oven: 20mm
Optional accessories*	Griddle plate	●	●	●	●										
	Teppan Yaki Large (40cm x 20cm)	●	●	●	●										
	Teppan Yaki Small (30cm x 20cm)	●	●	●	●										
	4 piece iittala cookware set	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Stainless steel roasting pan with lid	●	●	●	●						●		●		
	Stainless steel wok	●	●	●	●	●	●	●	●	●	●	●	●	●	

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide
Gas Cooktops.

Product overview		Gas								
Model	**Features**	**PPQ716B21A**	**PPH616B21A**	**PCT915B9TA**	**PCR915B91A**	**PCQ715B90A**	**PCI815B91A**	**PCH615B9TA**	**PBH615B9TA**	**PBH615B80A**
Dimensions	Width (cm)	**70**	**60**	**90**	**90**	**70**	**75**	**60**	**60**	**60**
	Appliance dimensions (WxD)	710 x 520mm	590 x 520mm	915 x 520mm	915 x 520mm	702 x 520mm	762 x 520mm	582 x 520mm	580 x 510mm	580 x 510mm
	Cut-out dimensions (WxD)	560 x 480-490mm (fits cut-out for 60cm)	560 x 480-490mm	850 x 490-500mm	850 x 490-500mm	560 x 480-490mm (fits cut-out for 60cm)	560 x 480-490mm (fits cut-out for 60cm)	560 x 480-490mm	560 x 480-490mm	560 x 480-490mm
Design		Black tempered frameless glass	Black tempered frameless glass	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Burner / Zone Output		5 burners including:	4 burners including:	6 burners including:	5 burners including:	5 burners including:	4 burners including:	4 burners including:	4 burners including:	4 burners including:
	Front left	Economy burner: 3.6Mj/h	Standard burner: 6.5Mj/h	Dual flame wok burner: 18Mj/h	High-speed burner: 10.8Mj/h	Economy burner: 3.6Mj/h	Triple flame wok burner: 16Mj/h	Dual flame wok burner: 18Mj/h	Dual flame wok burner: 18Mj/h	Dual flame wok burner: 12Mj/h
	Rear left	Standard burner: 6.5Mj/h	Standard burner: 6.5Mj/h	Economy burner: 3.6Mj/h	Economy burner: 3.6Mj/h	Standard burner: 6.5Mj/h		Standard burner: 6.5Mj/h	Standard burner: 6.5Mj/h	Standard burner: 6.5Mj/h
	Front centre	Triple flame wok burner: 16Mj/h		Economy burner: 3.6Mj/h	Dual flame wok burner: 18Mj/h	Triple flame wok burner: 16Mj/h	Economy burner: 3.6Mj/h			
	Rear centre			Standard burner: 6.5Mj/h			Standard burner: 6.5Mj/h			
	Front right	Standard burner: 6.5Mj/h	Economy burner: 3.6Mj/h	Dual flame wok burner: 18Mj/h	Standard burner: 6.5Mj/h	Standard burner: 6.5Mj/h	High-speed burner: 10.8Mj/h	Economy burner: 3.6Mj/h	Economy burner: 3.6Mj/h	Economy burner: 3.6Mj/h
	Rear right	High-speed burner: 10.8Mj/h	Dual flame wok burner: 12Mj/h	Standard burner: 6.5Mj/h	Standard burner: 6.5Mj/h	High-speed burner: 10.8Mj/h		High-speed burner: 10.8Mj/h	Standard burner: 6.5Mj/h	Standard burner: 6.5Mj/h
Convenience	Individual cast-iron trivets with rubber feet	●	●							
	3-pc cast-iron trivets with rubber feet			●	●					
	2-pc cast-iron trivets with rubber feet					●	●	●	●	●
	Enamelled cast-iron burner caps	●	●	●	●	●	●	●	●	
	Enamelled steel pan supports									●
Safety	Flame failure fitted to each burner	●	●	●	●	●	●	●	●	●
Controls	Rotrary controls - black & stainless steel	●	●	●	●	●	●	●		
	Sword controls - silver								●	●
Technical requirements		43.4Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	28.6Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	56.2Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	45.4Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	43.4Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	36.9Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	38.9Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	34.6Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	28.6Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm
Supplied accessories	Wok ring support	1	1	1	1	1	1	1	1	1
	Espresso cross support	1	1	1	1	1	1	1		
	LPG conversion kit	●	●	●	●	●	●	●	●	●
Other	Suitable for NG or LPG	●	●	●	●	●	●	●	●	●

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide Rangehoods.

Product overview		Canopy						Integrated	Slideout				
Model	**Features**	**DWA097E51A**	**DWB091E51A**	**DWB097E50A**	**DWW097A50A**	**DWW09W851A**	**DWW06W851A**	**DHL555BAU**	**DHI955FAU**	**DHI755FAU**	**DHI655NAU**	**DHI635KAU**	**DHI625NAU**
Dimensions	Width (cm)	**90**	**90**	**90**	**90**	**90**	**60**	**53**	**90**	**70**	**60**	**60**	**60**
	Appliance dimensions (HxWxD)	638-954 x 900 x 540mm (ducted) or 694 x 900 x 540mm (CleanAir module)	628-954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir module)	642-954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir module)	672-954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir module)	799-976 x 900 x 500mm (ducted) or 799-976 x 900 x 500mm (recirculated)	799-976 x 600 x 500mm (ducted) or 799-976 x 600 x 500mm (recirculated)	255 x 530 x 380mm	475 x 897 x 273mm (fits 60cm or 90cm cupboard)	475 x 697 x 273mm	465 x 597 x 273mm	354 x 598 x 280mm	252 x 598 x 280mm
Design		Stainless steel and glass	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Steel body with metallic finish	Steel body with metallic finish	Steel body with metallic finish	Steel body with metallic finish	Steel body with metallic finish	Steel body with metallic finish
	7 segment LED display	●	●	●									
	On/Off main switch control	●	●	●	●	●	●						
	Electronic controls with low lift push buttons for power & light	●	●	●									
	Electronic backlit push button controls for power & light				●								
	Slide controls for power & light							●	●	●	●		
	Rocker switches for power & light					●	●					●	●
	Concealed controls for power & light											●	●
	Lighting	2 x 3W LED SoftLights with dimmer function	3 x 3W LED SoftLights with dimmer function	3 x 3W LED SoftLights with dimmer function	3 x 3W LED lights	2 x 20W halogen lights	2 x 20W halogen lights	2 x 20W halogen lights	3 x 20W halogen lights	2 x 20W halogen lights	2 x 20W halogen lights	2 x 30W halogen lights	2 x 30W halogen lights
Power functions	Maximum extraction rate	690m³/h	810m³/h	730m³/h	730m³/h	780m³/h	730m³/h	710m³/h	830m³/h	820m³/h	490m³/h	400m³/h	220m³/h
	3 power levels plus 2 intensive settings	●	●	●									
	3 power levels plus 1 intensive setting				●			●	●	●	●		
	3 power levels					●	●					●	●
	Intensive setting with automatic switch back to previous setting 6mins	●	●	●	●								
	Residual shutdown with automatic run-on time 1-10 min	●	●	●									
	Rim ventilation system		●										
	EcoSilence Drive® brushless motor	●	●	●	●								
	Powerful single motor with twin fan					●	●						
	Powerful twin motor							●	●	●	●		
	Powerful single motor											●	●
Noise*		54dB at level 2 or 350m³/h (150mm ducted)	59dB at level 2 or 430m³/h (150mm ducted)	49dB at level 2 or 360m³/h (150mm ducted)	49dB at level 2 or 360m³/h (150mm ducted)	59dB at level 2 or 450m³/h (150mm ducted)	59dB at level 2 or 420m³/h (150mm ducted)	52dB at level 2 or 320m³/h (150mm ducted)	51dB at level 2 or 350m³/h (150mm ducted)	51dB at level 2 or 350m³/h (150mm ducted)	56dB at level 2 or 300m³/h (150mm ducted)	61dB at level 2 or 310m³/h (120mm ducted)	60dB at level 2 or 170m³/h (150mm ducted)
	Sound insulation mats		●	●	●								
Convenience	Dual layer metal grease filters	●	●	●	●	●	●	●	●	●	●	●	●
	1 x dishwasher-safe metal grease filter	●											●
	2 x dishwasher-safe metal grease filter						●	●	●	●	●	●	
	3 x dishwasher-safe metal grease filter		●	●	●	●							
	Saturation inducator for filters	●	●	●									
Technical requirements		136W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	269W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	139W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	139W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	255W total connected load; 220-240V / 50Hz; 120mm tube connection diameter	255W total connected load; 220-240V / 50Hz; 120mm tube connection diameter	240W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	240W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	240W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	240W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	160W total connected load; 220-240V / 50Hz; 100 and 120mm tube connection diameter	170W total connected load; 220-240V / 50Hz; 100 and 120mm tube connection diameter
Optional accessory		DHZ6200 Recirculation kit CleanAir module	DHZ6240 Recirculation kit CleanAir module	DHZ6240 Recirculation kit CleanAir module	DHZ6240 Recirculation kit CleanAir module	DHZ5275 Recirculation kit	DHZ5275 Recirculation kit	DHZ7305 Charcoal filter for recirculation	DHZ4950 Stainless steel finish pelmet; DHZ4505 Recirculation kit; DHZ4910 Mounting kit	DHZ4750 Stainless steel finish pelmet; DHZ4505 Recirculation kit	DHZ4650 Stainless steel finish pelmet; DHZ3320 White pelmet; DHZ3350 Metallic pelmet; DHZ4505 Recirculation kit	DHZ4650 Stainless steel finish pelmet; DHZ3320 White pelmet; DHZ3350 Metallic pelmet; DHZ3405 Recirculation kit	DHZ4650 Stainless steel finish pelmet; DHZ3320 White pelmet; DHZ3350 Metallic pelmet; DHZ3405 Recirculation kit
Other	Ducted and recirclated air operation	●	●	●	●	●	●	●	●	●	●	●	●

*The dB(A) value plus approx. 10-14 units is equivalent to a dB(A) re1pW value

Air extraction calculation examples to help you calculate your own requirements

Kitchen dimensions: L x W x H	Room volume	Minimum extraction rate (6 x per hour)	Maximum extraction rate (12 x per hour)
3 x 4 x 2.5m =	30m³	6 x 30m³ = **180m³/h**	12 x 32m³ = **360m³/h**
4 x 4 x 2.5m =	40m³	6 x 40m³ = **240m³/h**	12 x 40m³ = **480m³/h**
4 x 5 x 2.5m =	50m³	6 x 50m³ = **300m³/h**	12 x 50m³ = **600m³/h**
Calculate yourself			

Measurement of air extraction as used by Bosch

net fan power without installation

net fan power in appliance but without connection to ducting system

DIN/EN



net fan power in appliance and with connection to ducting system according to EN61591

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Accessories.

Oven and Cooker Accessories		
	Baking tray (Pyrolysis proof) Enamelled baking tray for cakes, biscuits, rolls and bread. Pyrolysis compatible with pyrolytic ovens. Suits all Bosch 60cm ovens **except** HBA13B253A.	**HEZ331000**
	Universal pan (Pyrolysis proof) Deep and large enameled pan for juicy fruit flans, pizza, large roasts, bread etc. Can also be used to catch any residual fat or dripping when grilling. Pyrolysis compatible with pyrolytic ovens. Suits all Bosch 60cm ovens **except** HBA13B253A.	**HEZ332000**
	**Wire rack** For all grilling applications. Suits all Bosch 60cm ovens **except** HBA13B253A.	**HEZ334000**
	Split grill tray (Pyrolysis proof) Designed to be used with either baking tray or universal pan and is ideal for cooking 2 food types on 1 level e.g. roast meat on one side using one half of split grill tray and roast vegetables on other side without split grill tray. Pyrolysis compatible with pyrolytic ovens. Suits all Bosch 60cm ovens **except** HBA13B253A.	**HEZ325000**
	'Profi' pan (Pyrolysis proof) Extra deep, large enamelled pan (10 litre capacity) with wire rack insert. Best suited for large roasts and is ideal for automatic programs when used in conjunction with 'Profi' pan lid. Pyrolysis compatible with pyrolytic ovens. *Note: stainless steel wire rack is not pyrolysis proof and must be removed prior to pyrolytic cleaning program.* Suits all Bosch 60cm ovens **except** HBA13B253A.	**HEZ333070**
	'Profi' pan lid (Pyrolysis proof) Large enamelled lid to match the 'Profi' pan. When used in conjunction with the 'Profi' pan creates the 'Profi' roaster which is ideal for automatic programs. Pyrolysis compatible with pyrolytic ovens. *Note: stainless steel handle is not pyrolysis proof and must be removed prior to pyrolytic cleaning program.* Suits all Bosch 60cm ovens **except** HBA13B253A.	**HEZ333001**
	**Wire rack for universal pan** Fits into the universal pan for all grilling applications. Universal pan and wire rack can be removed together. Suits all Bosch 60cm ovens **except** HBA13B253A.	**HEZ324000**
	Glass pan Made of oven-proof glass and can be used as a large cooking and serving dish. This glass pan is ideal for fish, toast or grilled dishes. Suits all Bosch 60cm ovens **except** HBA13B253A.	**HEZ336000**
	**Telescopic racking system 3-fold** Suits all Bosch 60cm ovens **except** HBA13B253A.	**HEZ338353**
	Pizza stone Pizza baking stone with wooden bread paddle. Baking stone is pyrolysis proof. Suits all Bosch 60cm ovens.	**HEZ327000**
	Stainless steel roasting pan Stainless steel roasting pan with glass lid, induction suitable. Suits all Bosch 60cm ovens **except** HBA13B253A.	**HEZ390011**
Compact Accessories		
	Baking tray Enamelled baking tray for cakes, biscuits, rolls and bread. Suits Bosch HBC84K553A.	**HEZ861000**
	Universal pan Extra deep enamelled pan for fruit flans, pizzas, deep-frozen dishes, large roasts and bread. This pan can be used to catch any residual fat or dripping when grilling. Suits Bosch HBC84K553A.	**HEZ862000**
	Glass pan Made of oven-proof glass and can be used as a large cooking and serving dish. Suits Bosch HBC84K553A.	**HEZ863000**

Compact Accessories		
	Microwave steam accessory For steaming of vegetables, etc, in the microwave. Made from stainless steel. Suits Bosch HMT35M653A and HBC84K553A (Microwave function only).	**HEZ86D000**
Induction Accessories		
	Griddle plate For use on two combined cooking zones. Evens heat to perfectly grill your favourite meats, fish or vegetables.	**HEZ390522**
	Teppan Yaki Enjoy induction the Japanese way! Try beef, prawns, scallops, lobster, chicken and chopped vegetables. Let your imagination go. Also great for steamers and available in two sizes (40cm x 20cm and 30cm x 20cm).	**Large – HEZ390512, Small – HEZ390511**
	Stainless steel roasting pan *(optional with steamer inset)* Cook large dishes without hot spots for results you'll be delighted with. A high performance roasting pan that no induction kitchen should be without. For use on two combined cooking zones.	**HEZ390011**
	Induction cookware set 4 piece 'iittala' induction cookware set consisting of 2 pots, 1 casserole and 1 fry pan.	**HEZ390040**
	Stainless steel wok Stainless steel wok for induction and ceramic cooktops. Includes glass lid and draining grid.	**HEZ390090**
Rangehood Accessories		
	CleanAir recirculation kit Fits Bosch DWA097E51A	**DSZ6200**
	CleanAir recirculation kit Fits Bosch DWB091E51A, DWB097E50A, DWW097A50A	**DSZ6240**
	Recirculation set / charcoal filter For Bosch DHI625NAU	**DHZ3105**
	Recirculation set / charcoal filter For Bosch DHI635KAU	**DHZ3405**
	Recirculation set / charcoal filter For Bosch DHI655NAU, DHI755FAU, DHI955FAU	**DHZ4505**
	Recirculation set / charcoal filter For Bosch DWW06W851A, DWW09W851A	**DHZ5275**
	Recirculation set / charcoal filter For Bosch DHL555BAU	**DHZ7305**
	Charcoal filter For Bosch DHL555BAU	**DHZ7305**
	White pelmet Fits all Bosch 60cm slideout rangehoods except commercial model DHI623GAU	**DHZ3320**
	Metallic pelmet Fits all Bosch 60cm slideout rangehoods except commercial model DHI623GAU	**DHZ3350**
	Stainless steel finish pelmet Fits all Bosch 60cm slideout rangehoods except commercial model DHI623GAU	**DHZ4650**
	Stainless steel finish pelmet Fits Bosch DHI755FAU	**DHZ4750**
	Stainless steel finish pelmet Fits Bosch DHI955FAU	**DHZ4950**
	Mounting kit for 90cm cupboard Fits Bosch DHI955FAU	**DHZ4910**

Technical diagrams.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

60cm Built-in Oven



*20 mm for metal fascias



*20 mm for metal fascias



* 20 mm for metal fascias

Measurements in mm

HBG73S550A, HBA63S451A, HBA63B250A, HBG43S450A, HBG43S420A, HBA13B254A

60cm Built-in Oven



* 20 mm for metal fascias

Measurements in mm

HBL43S450A

60cm Built-in Oven



* 20 mm for metal fascias

Measurements in mm

HBR43S450A

60cm Built-in Oven



* 20 mm for metal fascias

Measurements in mm

HBA13B253A

90cm Built-in Oven





Measurements in mm

HBX33R1

60cm Built-in Double Oven



Measurements in mm

HBM43S550A, HBM43B250A

90cm Freestanding Gas / Catalytic Cooker









Measurements in mm

HSB738356A

Technical diagrams.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

60cm Freestanding Gas / EcoClean Cooker



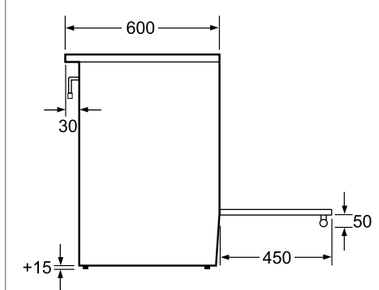



Measurements in mm

HGV74W355A

60cm Freestanding Induction / Pyrolytic Cooker



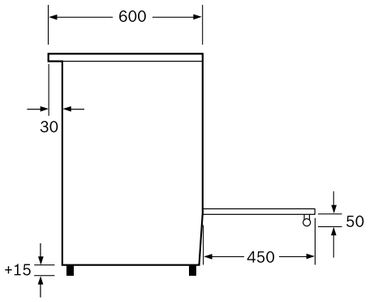



Measurements in mm

HCE858451A

60cm Built-In Coffee Machine



An installation height >950 mm makes it difficult to fill the containers for beans and water which are fitted on the top.



The fully automatic espresso machine can be fitted above a warming drawer. An intermediate floor is not required.

Fully automatic espresso machine
left-hand corner installation
right-hand corner installation

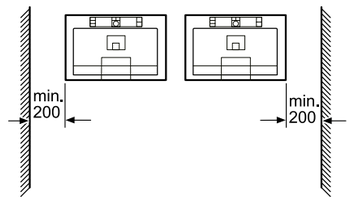

Measurements in mm

TCC78K751A

60cm Built-in Combination Steam and Pure Steam Oven







* 20 mm for metal fascias

Measurements in mm

HBC34D554P, HBC24D553P

Technical diagrams.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

60cm Built-in Combination Microwave Oven





Measurements in mm

HBC84K553A

60cm Built-in Microwave

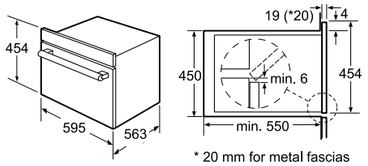

* 20 mm for metal fascias

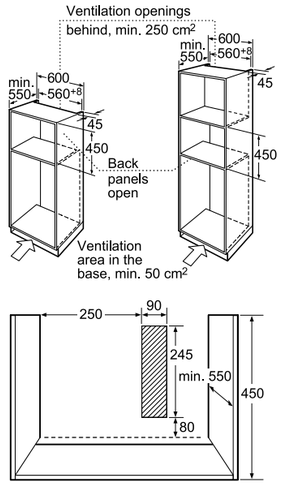

Measurements in mm

HMT35M653A

60cm Built-in Warming Drawer

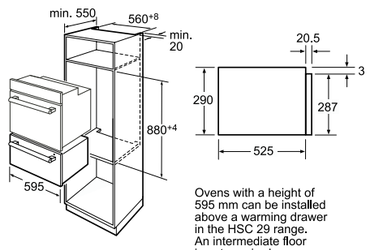

Ovens with a height of 595 mm can be installed above a warming drawer in the HSC 29 range. An intermediate floor is not required.

Measurements in mm

HSC290652A

60cm Built-in Warming Drawer

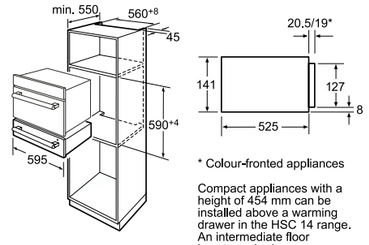

* Colour-fronted appliances

Compact appliances with a height of 454 mm can be installed above a warming drawer in the HSC 14 range. An intermediate floor is not required.

Measurements in mm

HSC140652A

Installation Requirements for Induction Cooktops Only





① Ventilation gap must be present.



Measurements in mm

Cookware for Induction Cooktops

Important:

Induction heating relies on creating a controlled electro-magnetic field, which requires magnetic-based cookware. This includes stainless steel cookware with a magnetic base, enamelled steel or cast-iron. Glass, aluminium, copper or ceran pots are not suitable for use. If you are unsure, hold a magnet to the base of the cookware. If it attracts and holds, then the cookware is most probably suitable.

80cm FlexInduction Cooktop



* Minimum distance from the hob cut-out to the wall
** Maximum recessed depth
*** With fitted oven underneath min. 30, possibly more; see space requirements for the oven.

Measurements in mm

PIN875N17E

60cm FlexInduction, Induction Cooktop



* Minimum distance from the hob cut-out to the wall
** Maximum recessed depth
*** With fitted oven underneath min. 30, possibly more; see space requirements for the oven.

Measurements in mm

PIN675N17E, PIE675N14E

Technical diagrams.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

80cm CombiInduction®, Induction Cooktop



* Minimum distance from the hob cut-out to the wall
** Maximum recessed depth
*** With fitted oven underneath min. 30, possibly more; see space requirements for the oven.

Measurements in mm

PIT851F17E, PIM851F17E

60cm CombiInduction®, Induction Cooktop



* Minimum distance from the hob cut-out to the wall
** Maximum recessed depth
*** With fitted oven underneath min. 30, possibly more; see space requirements for the oven.

Measurements in mm

PIT651F17E, PIE651F17E, PIL611B18E

70cm Induction Cooktop



* Minimum distance from the hob cut-out to the wall
** Maximum recessed depth
*** With fitted oven underneath min. 30, possibly more; see space requirements for the oven.

Measurements in mm

PIE775N14E

80cm Ceramic Cooktop



* Minimum distance from the hob cut-out to the wall
** Maximum recessed depth
*** With fitted oven underneath, possibly more; see space requirements for the oven

Measurements in mm

PKC875N14A

70cm Ceramic Cooktop



* Minimum distance from the hob cut-out to the wall
** Maximum recessed depth
*** With fitted oven underneath, possibly more; see space requirements for the oven

Measurements in mm

PKG775N14A

60cm Ceramic Cooktop



* Minimum distance from the hob cut-out to the wall
** Maximum recessed depth
*** With fitted oven underneath, possibly more; see space requirements for the oven

Measurements in mm

PKN675N14A

60cm Ceramic Cooktop



* Minimum distance from the hob cut-out to the wall
** Maximum recessed depth
*** With fitted oven underneath, possibly more; see space requirements for the oven

Measurements in mm

PKF645D17A

60cm Ceramic Cooktop



* Minimum distance from the hob cut-out to the wall
** Maximum recessed depth
*** With fitted oven underneath, possibly more; see space requirements for the oven

Measurements in mm

PKE645C17A

70cm Tempered Glass Gas Cooktop



* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven

60cm Tempered Glass Gas Cooktop



* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven



Measurements in mm

PPH616B21A



Measurements in mm

PPQ716B21A

Technical diagrams.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

90cm Gas Cooktop



* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven

Measurements in mm

PCT915B9TA

90cm Gas Cooktop



* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven

Measurements in mm

PCR915B91A

70cm Gas Cooktop



* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven

Measurements in mm

PCQ715B90A

75cm Gas Cooktop



* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven

Measurements in mm

PCI815B91A

60cm Gas Cooktop



* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven

Measurements in mm

PCH615B9TA

60cm Gas Cooktop



* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven

Measurements in mm

PBH615B9TA, PBH615B80A

90cm Wall-Mounted Canopy Rangehood



(1) Exhaust air
(2) Circulated air*
(3) Air outlet - Fit the exhaust air slot facing downwards

*Circulated air dimensions do not apply to CleanAir recirculation kit



If using a back panel, the design of the appliance must be taken into account.





* from upper edge of pan support



* from upper edge of pan support

Measurements in mm

DWA097E51A

90cm Wall-Mounted Canopy Rangehood



(1) Exhaust air
(2) Circulated air*
(3) Air outlet - Fit the exhaust air slot facing downwards

*Circulated air dimensions do not apply to CleanAir recirculation kit



If using a back panel, the design of the appliance must be taken into account.





* from upper edge of pan support



* from upper edge of pan support

Measurements in mm

DWB091E51A

Technical diagrams.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

90cm Wall-Mounted Canopy Rangehood



(1) Exhaust air
(2) Circulated air*
(3) Air outlet - install with vent at bottom for exhaust air

*Circulated air dimensions do not apply to CleanAir recirculation kit





* from upper edge of pan support



* from upper edge of pan support

Measurements in mm

DWB097E50A

90cm Wall-Mounted Canopy Rangehood



(1) Exhaust air
(2) Circulated air*
(3) Air outlet - Fit the exhaust air slot facing downwards

*Circulated air dimensions do not apply to CleanAir recirculation kit





* from upper edge of pan support



* from upper edge of pan support

Measurements in mm

DWW097A50A

90cm Wall-Mounted Canopy Rangehood







* From upper edge of pan support



* From upper edge of pan support

Measurements in mm

DWW09W851A

60cm Wall-Mounted Canopy Rangehood







* From upper edge of pan support



* From upper edge of pan support

Measurements in mm

DWW06W851A

Technical diagrams.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

53cm Integrated Rangehood







Measurements in mm

DHL555BAU

90cm Slideout Rangehood







Measurements in mm

DHI955FAU

70cm Slideout Rangehood







Measurements in mm

DHI755FAU

60cm Slideout Rangehood







Measurements in mm

DHI655NAU

60cm Slideout Rangehood







Measurements in mm

DHI635KAU

60cm Slideout Rangehood







Measurements in mm

DHI625NAU

This much is for sure: you can trust in our service.

Reliable, experienced, fast. The customer service of Bosch; before and after purchase.

Quality service straight from the manufacturer
Original Bosch

We are committed to quality even when it comes to after-sales service because no one knows Bosch appliances better than our highly trained service engineers. Working with the latest equipment for measuring, diagnostics and repairs, Bosch service engineers only use original Bosch spare parts.

Reliability guaranteed
No compromises

All Bosch home appliances are produced with maximum care with high-quality materials. We promise it in our 2-year manufacturer‘s warranty on all appliances.

Lifetime service
It goes without saying at Bosch

Once your warranty period is over, we are still there to assist you. You can rely on expert care and first-rate service throughout the life cycle of your appliance. From missing instruction manuals to appliance repair – we take care of everything.

Original accessories
Effective care products

Take a look at our extensive range of accessories for some inspiration: discover additional uses, replace old materials for optimum operation or simply give a trusty home appliance a good work-over. With the right care, you will be able to enjoy your high-quality appliance for many years to come. To help you do so, we offer a wide range of Bosch certified cleaning and care products.

Extensive customer service network
Just a call away

Customer Care
Our friendly Bosch Customer Care team is on-hand to provide competent, reliable assistance. Before or after purchase, the Bosch team will be happy to advise you on products, their use and special functions.

Bosch Customer Care: 1300 368 339
Monday to Friday, 8:30am to 6:00pm.

Service & Repairs
Our team is there to provide the right advice on faults, arranging a visit of a service engineer and ordering the right accessories or spare parts.

Bosch Repairs & Service, Accessories and Spare Parts: 1300 360 447
Monday to Friday, 8:30am to 5:00pm.

BSH Home Appliances Pty Ltd

7-9 Arco Lane
Heatherton VIC 3202

Postal Address
PO Box 505
Moorabbin VIC 3189

Customer Service
Phone: 1300 368 339
Fax: 1300 306 818

www.bosch-home.com.au

Bosch Cooking Solutions brochure is printed in an environmentally conscious way, using inks containing linseed oils and stock manufactured to high environmental standards.

This material is printed on Grange Offset, proudly manufactured by Australian Paper. Grange Offset is PEFC certified and manufactured in a facility with ISO 14001 EMS certification.

The print company has a strict environmental policy and they are an FSC®-certified print company. They use initiatives such as computer-to-plate technology, water/isopropyl alcohol reductions in printing presses and recycling throughout the organisation. This is in addition to the ink selection as discussed above and in their advice to all clients on the environmental implications of paper selection and usage.

Certain appliances shown in this catalogue are not available in your country. Model numbers and specifications are for reference only and subject to change without prior notice. Please contact your local Bosch retailer for the latest information.

Whilst every care has been taken in the preparation of this publication, BSH does not warrant the accuracy or completeness of the information in this publication and BSH reserves the right to alter specifications without notice. To the extent permitted by law, BSH excludes all liability, including negligence, for any loss incurred in reliance on the contents of this publication.

Printed in Australia. KRD 09/2014 – BH 2174 B